

STANLEY

®

Clean Room

2000/3000/5000 Door Series

- CLASS 1 & CLASS 10 RATED
- MICROPROCESSOR CONTROLLED
- ADVANCED SENSOR OPTIONS
- CONTROLLED ENTRY



CONTAMINATION-CONTROLLED ACCESS FOR TODAY'S HIGHLY SENSITIVE TECHNOLOGICAL ENVIRONMENTS

Industry rated for biotechnology, pharmaceutical, aerospace, medical & dental devices, hospitals, industrial applications and more.

Class 1 and Class 10 rated sliding doors are designed and manufactured for conventional or modular construction.

Advanced motion & video sensors provide complete protection and contamination controlled entry into clean room areas and vestibules.

Microprocessor controller continually monitors door position and specially designed urethane wheels provide smooth, trouble-free operation.

Anti-riser wheels lock each door in its track while a fiberglass reinforced toothed drive belt prevents slippage and uneven closing.

5200 & 5300 Telescopic series opens 25% wider than two-panel and four-panel sliding door configurations.

Full breakout package allows all panels to swing out and stack to the side for emergency egress.

Stanley Automatic Door Systems - the safest, most cost effective solutions available today.




STANLEY

MAKE SOMETHING GREAT™

STANLEY®




Clean Room 2000/3000/5000 Door Series

2000 SERIES

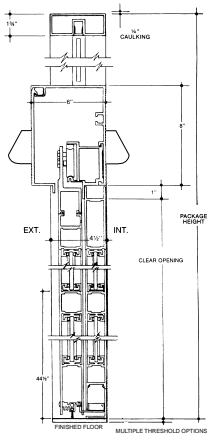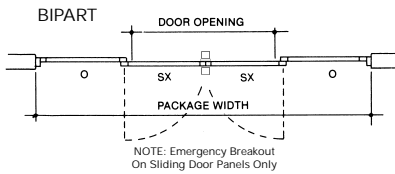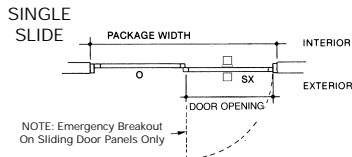

NOTE: Transom Package Available for both 2000 & 3000 Series

3000 SERIES

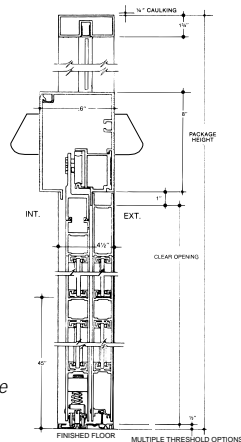




Door packages are custom manufactured to fit your job requirements. For sizes greater or smaller than typical, contact your authorized Stanley Access Technologies Sales Representative.




HEADER SIZE: 8" (203mm) high x 6" (152mm) deep
TYPICAL HEIGHT: 7'-8" (2.3m), clear door opening of 6'-11" (2.1m)
TYPICAL WIDTH: Single Slide: 7' to 9' (2.1m to 2.7m), clear door opening width of 35-1/2" to 47-1/2" (901mm to 1206mm). Bi-Part: 10' to 14' (3m to 4.2m), clear door opening width of 48" to 72" (1219mm to 1828mm)
TYPICAL DOOR PANEL WEIGHT: up to 220 pounds each (100kg)
DRIVE SYSTEM: 1/4 HP DC motor, gear drive, toothed belt
CONTROLLER: microprocessor based, safety logic, watchdog LED
SENSORS: 2 for motion (switchable between uni-directional and bi-directional) and 1 Stan-Guard® and doorway holding beam for safety. Stan-Vision™ Digital Video Cameras Optional. Mats, wallplates, radio control optional.
BREAKOUT: SX panel on the 2000, SX and SO panels on the 3000
POWER REQUIRED: 120 VAC, 5 amps min.
CODE COMPLIANCE: UL, cUL, ANSI A156.10, UBC, BOCA, ICBO, NFPA 101, Class 1 Clean Room Rated



5200 SERIES

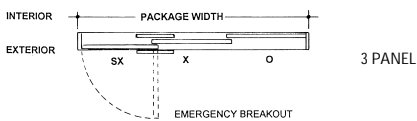

5300 SERIES



HEADER SIZE: 7" (177mm) high x 6" (152mm) deep
TYPICAL HEIGHT: 7'-8" (2.3m), clear door opening of 6'-11-7/8" (2.1m)
TYPICAL WIDTH: 3 panel: 6' (1.8m) to 12' (3.6m), clear door opening width of 35-5/8" (914mm) to 84-5/8" (2159mm)
 6 panel: 7' (2.1m) to 14' (4.2m), clear door opening width of 35-9/16" (902mm) to 91-9/16" (2324mm)
TYPICAL DOOR PANEL WEIGHT: up to 150 pounds each (68kg)
DRIVE SYSTEM: 1/4 HP DC motor, gear drive, toothed belt
CONTROLLER: microprocessor based, safety logic, watchdog LED
SENSORS: Two Stanley SU-100 motion sensors one Stanley Stan-Guard presence sensor and doorway holding beams. Mats, wallplates, radio control optional.
BREAKOUT: lead panel (SX) on the 5200, all panels (SX, SX, SO) on the 5300
POWER REQUIRED: 120 VAC, 5 amps min.
CODE COMPLIANCE: UL, cUL, ANSI A156.10, UBC, BOCA, ICBO, NFPA 101, Class 10 Clean Room Rated

CUSTOMER CARE: 1-800-7-ACCESS (1-800-722-2377)

STANLEY®

Security Solutions

Stanley Access Technologies
 Stanley Security Solutions Product Group
 Customer Care: 1-800-7-ACCESS (1-800-722-2377)
<http://www.stanleyworks.com>