

# Widest ICU Clear Door Opening

## **PROCARE 8500™** TELESCOPING 3 PANEL ICU DOOR

**Seamless patient and equipment transfer without needing breakout.**

The latest ICU door in our ProCare Series, the ProCare 8500 comes in fully automatic, automatic with Power Assist (8500A) or manual. The 8500A easily switches between power assist and automatic mode. With the same size header utilized for both manual and automatic applications, sight lines through the facility are maintained for an improved aesthetic. The ProCare 8500 was engineered to create the widest clear door opening in the industry at over 56" of clearance for an 8' telescoping, 3-panel ICU door.

### **Features and Benefits**

- 56"\* CDO on an 8' telescoping ICU door
- Redesigned header to maintain aesthetics and provide larger height clearance
- Effortless breakout and reset with single button release
- Quiet operation for patient comfort
- Contoured handles and latch shield eliminate snagging on IV lines, electrical cords, and other equipment
- Synchronized moving panels on a fully trackless system prevent slamming for quieter operation and less wear on components


\*CDO for manual 8' package is 56.8", automatic 8' package is 55.7"

# PROCARE 8500™ TELESCOPING 3 PANEL ICU DOOR

www.stanleyaccess.com

## OPTIONAL FEATURES

- Antimicrobial touchpoints for greater patient and staff protection
- Electric privacy glass or privacy blinds
- Self-closing with electromagnetic hold open for manual doors
- Keyed or card reader access for increased security
- Low and full energy automatic options
- Packages available for smoke and draft prevention, airborne infection isolation (manual and automatic), and clean rooms applications

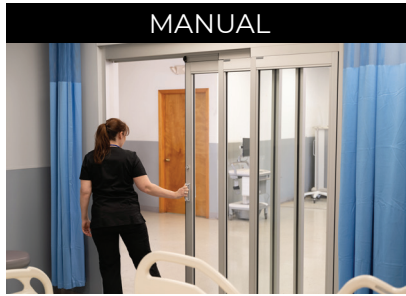

## SPECIFICATIONS



| Description                    | Configuration  |
|--------------------------------|--|
| Configurations                 | Automatic or Manual 3-Panel Trackless, Smoke & Draft (optional), Isolation (optional)  |
| Swing Out                      | 3 Panels swing out from full open position   |
| Typical Height                 | 88" (Std); taller available.   |
| Typical Width                  | 3-Panel (Std) ; 84" to 120", 96" (Std)   |
| Header Size                    | 4 1/8" Nominal Height  |
| Jamb Dimension                 | Manual – 6"x7/8" standard, 6"x1 3/4" optional. Auto – 6"x1 3/4" only   |
| Clear Door Opening Width       | Manual: 56.8" at 96" package width (7/8" jambs); Auto: 55.7" at 96" package width (1 3/4" jambs) <i>Refer to architectural drawing for CDO at other package widths</i> |
| Utility Breakout Nominal Width | Manual: 87.8" at 96" package width (7/8" jambs); Auto: 86" at 96" package width (1 3/4" jambs) <i>Refer to architectural drawing for CDO at other package widths</i>   |
| Supported Glazing              | 1/4" (Std); 5/8", 1/2", 1" Insulated, Electronic Privacy Glass (EPG), Privacy Blinds   |
| Stiles                         | Narrow   |
| Bottom Rails                   | 4" (Std), 6", 8", 10", 12", other custom   |
| Muntins                        | 0, 1 (Std) or 2   2" and 4 1/4" Std. Other options available.  |
| Finishes                       | Anodized, PVDF Paint, Anti-Microbial (Touch Points)  |
| Hardware Options               | Positive Latch, Single-Point Locking, Concealed Self Closing   |
| Listings                       | UL1784   |
| Ratings                        | Leakage (Smoke & Draft), Positive/Negative Pressure (ASTM E283), Clean Room (ISO 14644-1, Class 3), STC (Sound Transmittance)  |
| Codes And Standards            | NFPA 101, NFPA 105, IBC, FGI   |
| Activation/Safety              | Full Energy ANSI/BHMA A156.10 (Std), Low Energy ANSI/BHMA A156.38 (Full Energy / Low Energy); Jamb Mounted Touchless Activation + Combined Activation/Safety Sensors   |

\* All Specifications are subject to change. Please contact your local sales representative to ensure accuracy.

## LOCKING OPTIONS

- Positive Latching (Optional; included with smoke-rated products)
- Cylinder Pull with lock
- Key/Thumb Turn Hook Bolt (1-Point)
- Lock position indicator (optional)
- Electric Strike (Automatic only)

## ARCHITECTURAL DRAWINGS

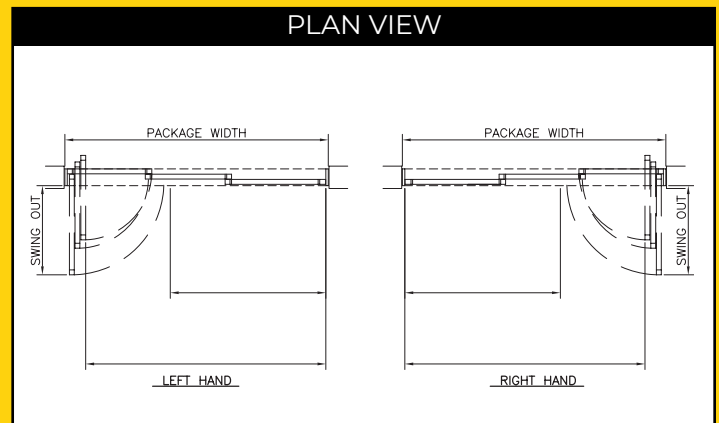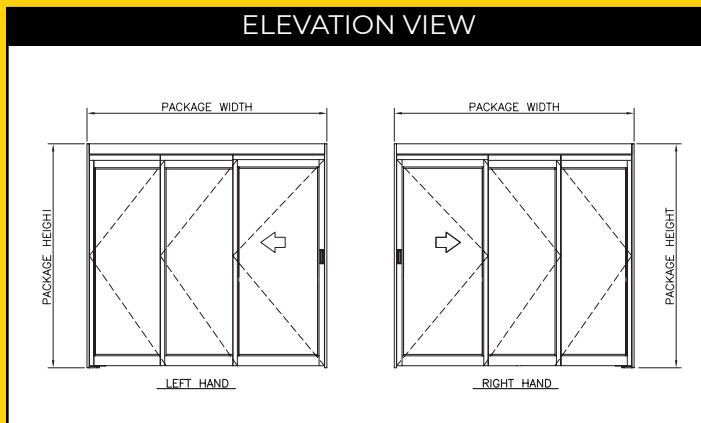

Drawings shown are 7/8" jambs for manual doors. Automatic doors require 1 3/4" jambs