

STANLEY
Access Technologies

**DURA-GLIDE
2000AG
SERIES**

BI-PART WITH OPTIONAL TRANSOM

PROJECT INFORMATION


PROJECT NAME:

LOCATION:

DOOR NUMBER(S):


DATE:

SHEET: OF

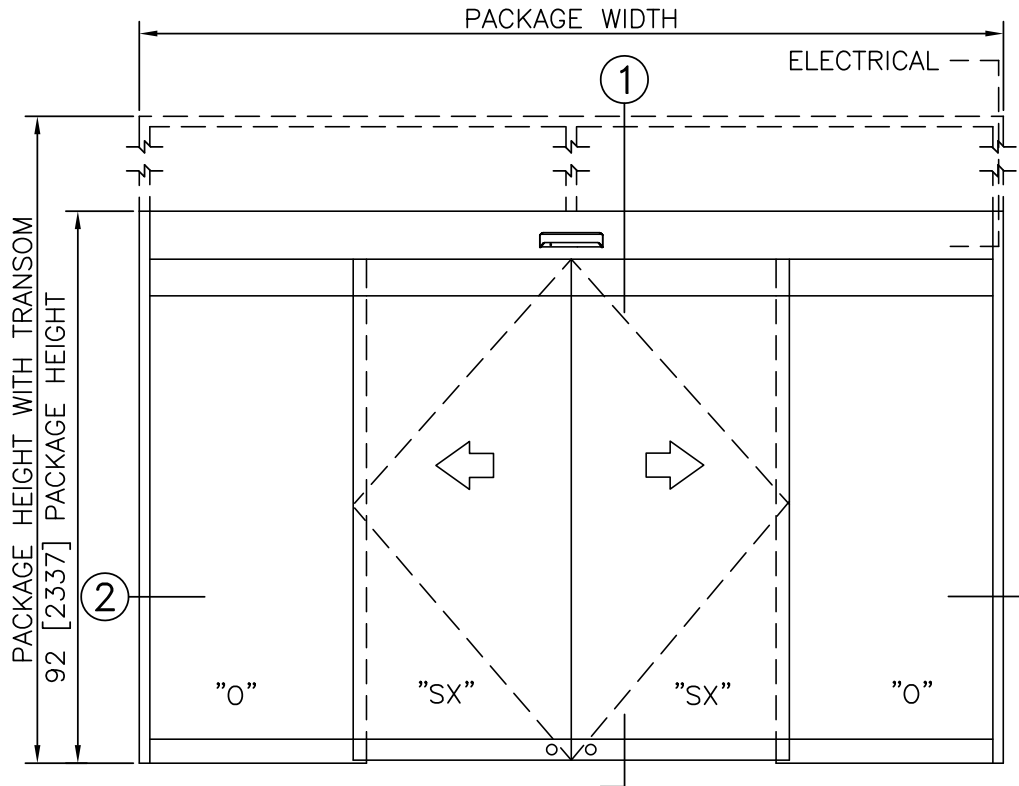

ELEVATION VIEW

SCALE: 3/8" = 1'-0"

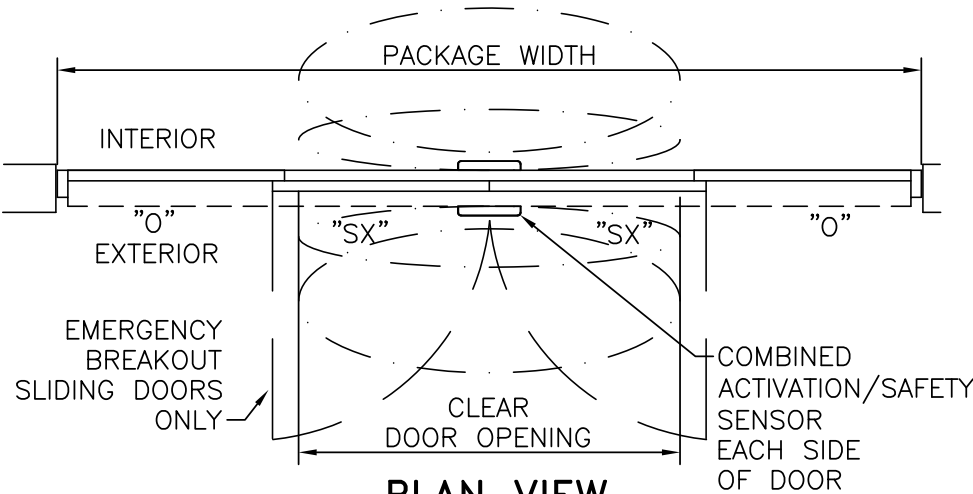


PLAN VIEW

SCALE: 3/8" = 1'-0"


NOTES

1. ELECTRICAL REQUIREMENTS: 120 VAC, 5 AMP MIN TO POWER OPERATOR BY ELECTRICAL CONTRACTOR.
2. ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. LIMITS OF ACTIVATION AND SAFETY ZONES ARE FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR DETAILED REQUIREMENTS.
4. STANDARD LOCKING IS 2-POINT, AUTOMATIC LOCKING SYSTEMS AVAILABLE
5. STANDARD GLAZING STOPS FOR ALL PANELS ARE 1/2"[13].
6. STANDARD JAMB TUBES SHOWN; 6"[152] AVAILABLE.
7. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

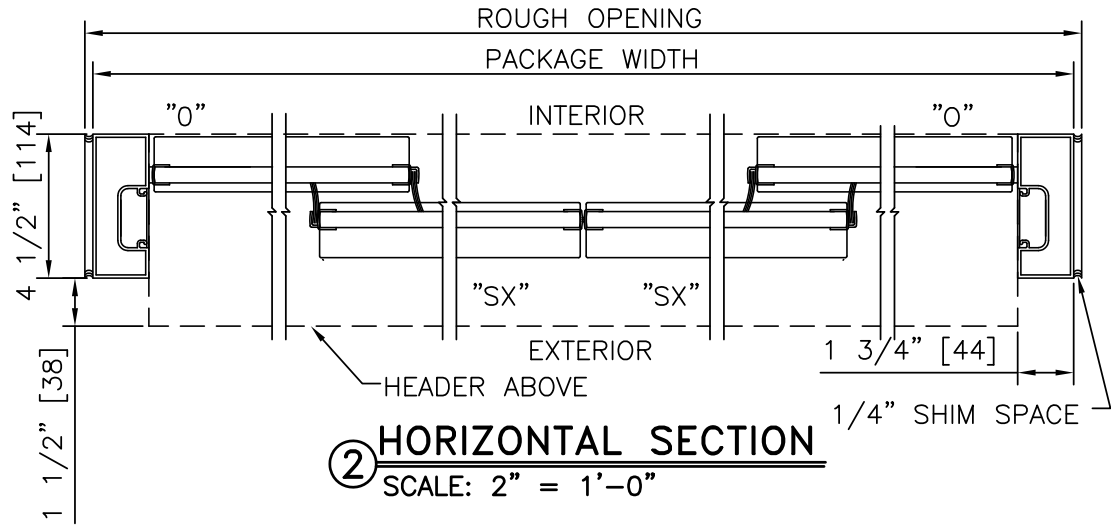

HORIZONTAL SECTION

SCALE: 2" = 1'-0"

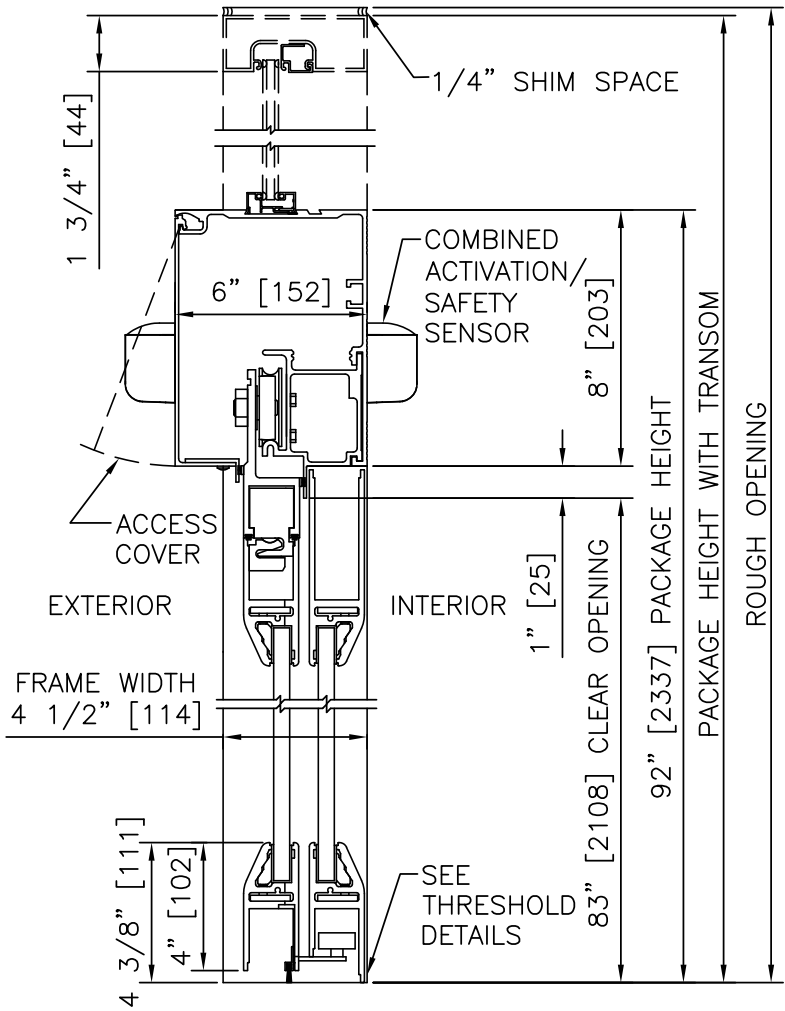

VERTICAL SECTION

SCALE: 2" = 1'-0"

PRODUCT OPTIONS

- TRANSOM**
- ☐ YES
 - ☐ VERTICALS 1 2 3
- FINISH**
- ☐ ANODIZED CLEAR CL2
 - ☐ ANODIZED DK BRONZE
 - ☐ CUSTOM
- LOCKING**
- ☒ 2-POINT
 - ☐ AUTOMATIC LOCKING (ELECTRIC LOCK)
- THRESHOLDS**
- ☐ SQ/BVL (EXT)
 - ☐ SQ/BVL (INT)
 - ☐ DBL BVL
 - ☐ RECESSED
- ACTIVATION/SAFETY**
- ☒ 2 COMBINED ACTIVATION/SAFETY SENSORS
- OTHER OPTIONS**
- ☐ ROTARY CTRL SWITCH
 - ☐ KEYED
 - ☐ UNINTERRUPTIBLE POWER SUPPLY
 - ☐ FLY OPEN BOX


BI-PART FORMULAS - NARROW STILE
PACKAGE WIDTH = 2 X CLEAR DOOR OPENING + 23.4"
CLEAR DOOR OPENING = 1/2 PACKAGE WIDTH - 11.7"
EMERGENCY BREAKOUT WIDTH = CLEAR DOOR OPENING + 7.3"
DOOR PANEL WIDTH = 1/4 PACKAGE WIDTH + 0.3"

TYPICAL PACKAGE DIMENSIONS (NARROW STILE)			
PACKAGE WIDTH	NOMINAL CLEAR DOOR OPENING	DOOR PANEL NOMINAL WIDTH	EMERGENCY BREAKOUT NOM. WIDTH
120"	48.3"	30.3"	55.6"
144"	60.3"	36.3"	67.6"
168"	72.3"	42.3"	79.6"


BI-PART WITH OPTIONAL TRANSOM

**DURA-GLIDE
2000AG
SERIES**

STANLEY
Access Technologies

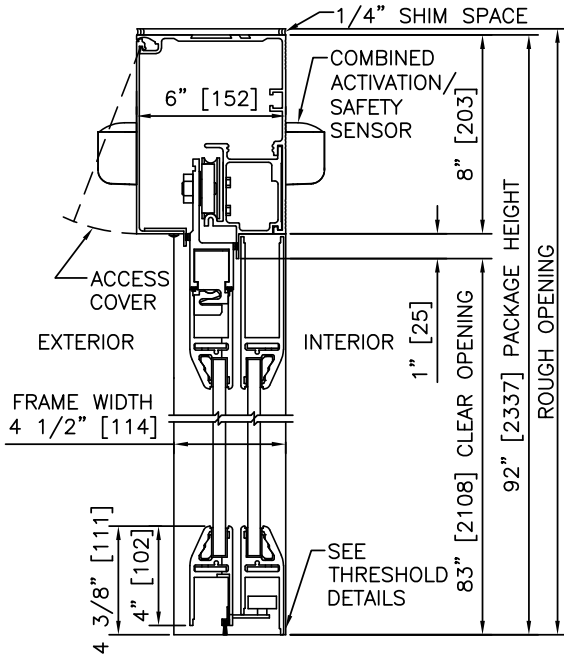


1 VERTICAL SECTION

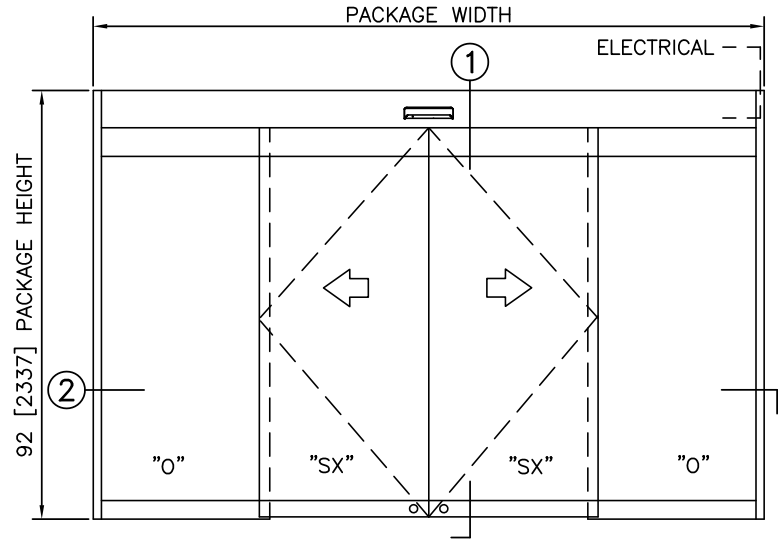


ELEVATION

NOTES

1. ELECTRICAL REQUIREMENTS: 120 VAC, 5 AMP MIN TO POWER OPERATOR BY ELECTRICAL CONTRACTOR.
2. ROUGH OPENING SHALL PROVIDE 1/4\"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. LIMITS OF ACTIVATION AND SAFETY ZONES ARE FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR DETAILED REQUIREMENTS.
4. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

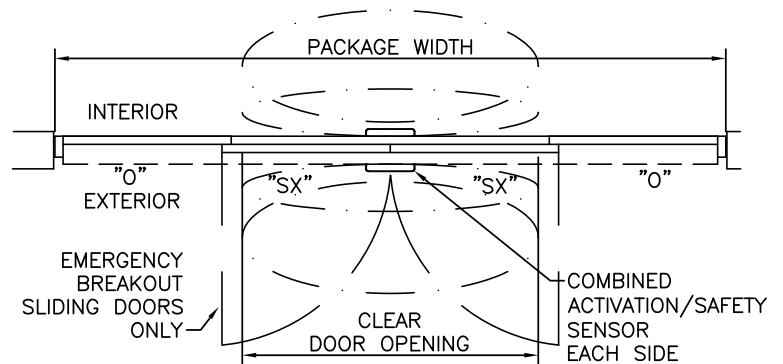


PLAN

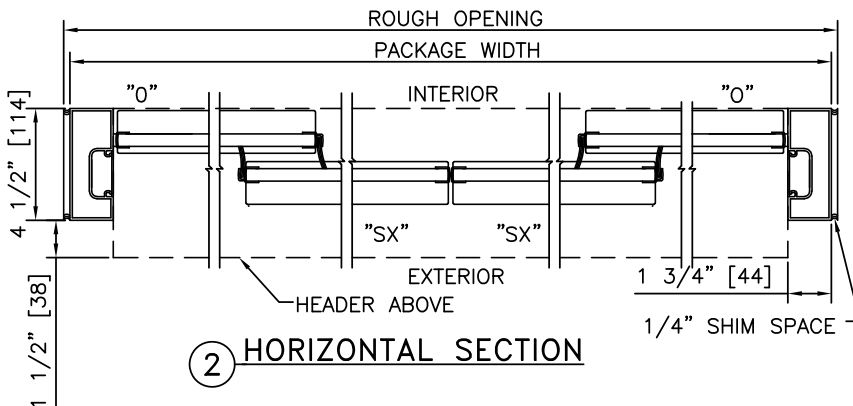


2 HORIZONTAL SECTION

TYPICAL PACKAGE DIMENSIONS (NARROW STILE)


PACKAGE WIDTH	NOMINAL CLEAR DOOR OPENING	DOOR PANEL NOMINAL WIDTH	EMERGENCY BREAKOUT NOM. WIDTH
120"	48.3"	30.3"	55.6"
144"	60.3"	36.3"	67.6"
168"	72.3"	42.3"	79.6"

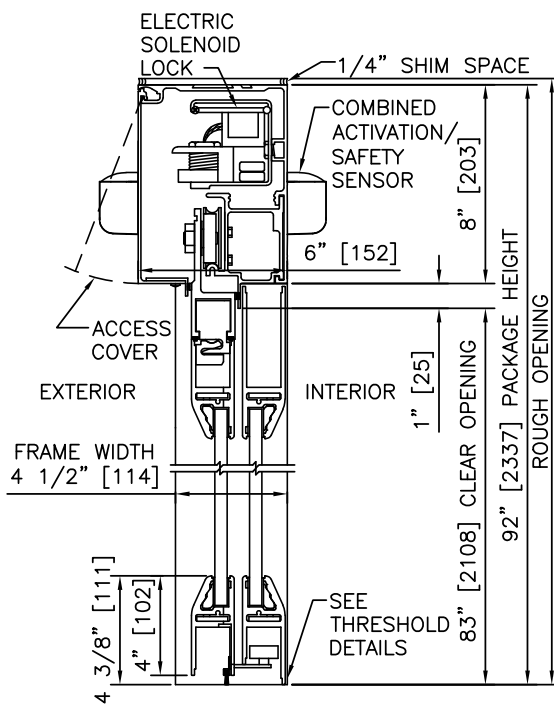

① VERTICAL SECTION

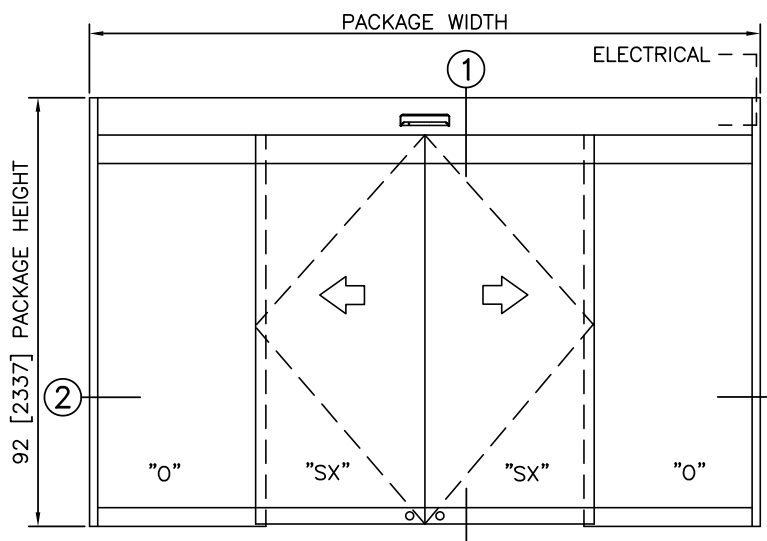


ELEVATION

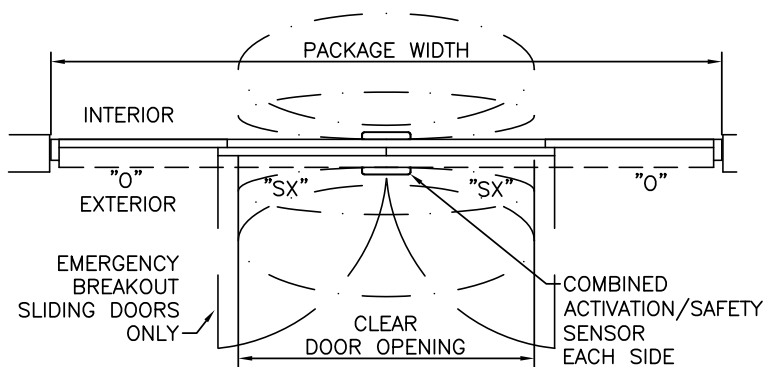

PLAN

NOTES


1. ELECTRICAL REQUIREMENTS: BY ELECTRICAL CONTRACTOR
 - 1.1. 120 VAC, 5 AMP MIN TO POWER OPERATOR
 - 1.2. CONTROL CIRCUIT FROM SECURE ACTIVATION TO OPERATOR
2. ROUGH OPENING SHALL PROVIDE 1/4\"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. LIMITS OF ACTIVATION AND SAFETY ZONES ARE FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR DETAILED REQUIREMENTS.
4. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

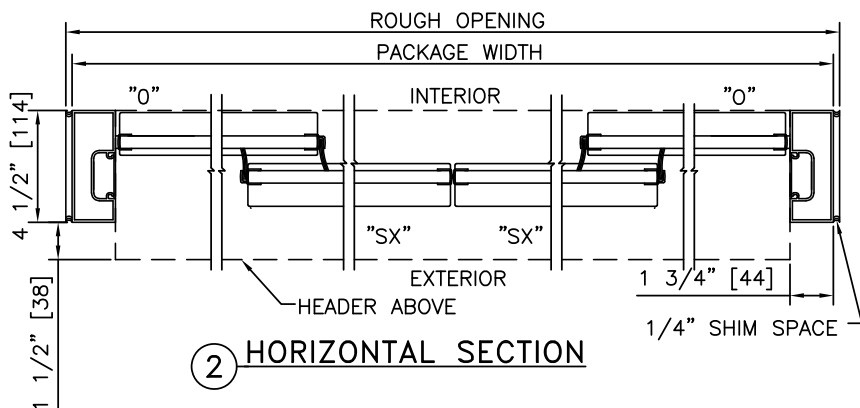


② HORIZONTAL SECTION

TYPICAL PACKAGE DIMENSIONS (NARROW STILE)

PACKAGE WIDTH	NOMINAL CLEAR DOOR OPENING	DOOR PANEL NOMINAL WIDTH	EMERGENCY BREAKOUT NOM. WIDTH
120"	48.3"	30.3"	55.6"
144"	60.3"	36.3"	67.6"
168"	72.3"	42.3"	79.6"

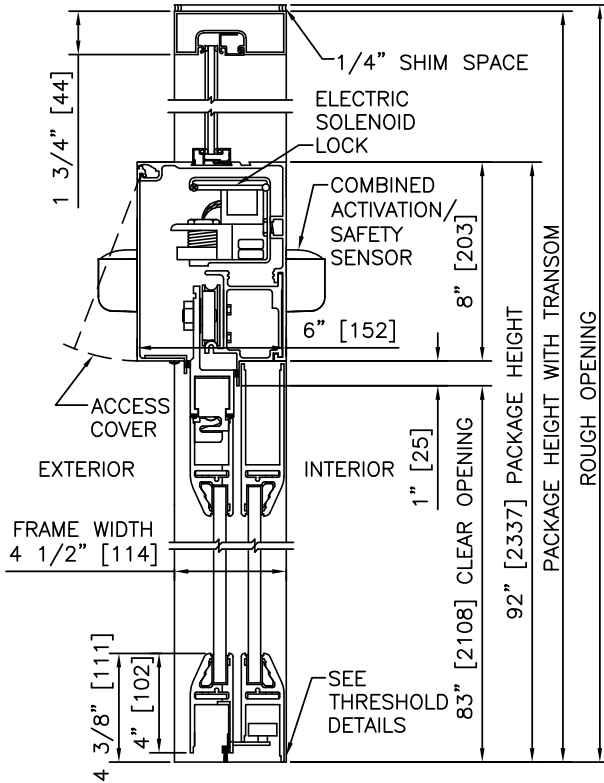


1 VERTICAL SECTION

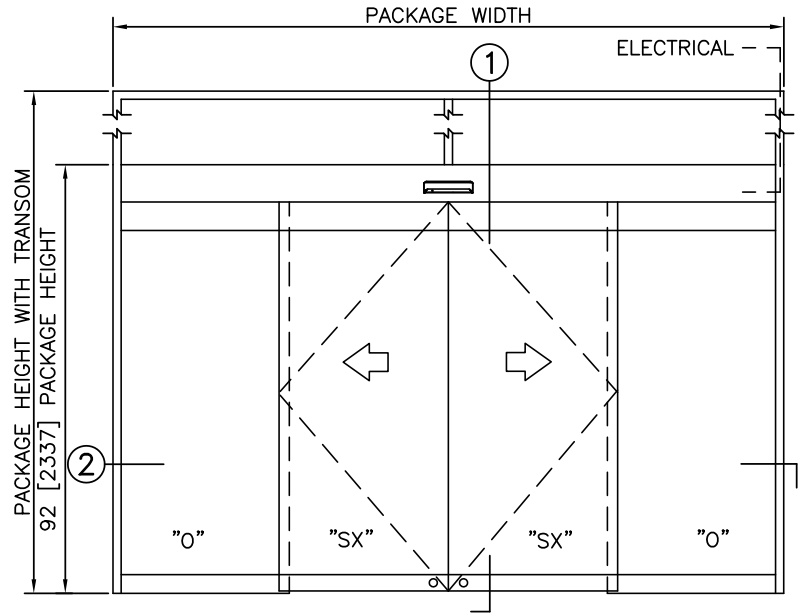


ELEVATION

NOTES

1. ELECTRICAL REQUIREMENTS: BY ELECTRICAL CONTRACTOR
 - 1.1. 120 VAC, 5 AMP MIN TO POWER OPERATOR
 - 1.2. CONTROL CIRCUIT FROM SECURE ACTIVATION TO OPERATOR
2. ROUGH OPENING SHALL PROVIDE 1/4\"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. LIMITS OF ACTIVATION AND SAFETY ZONES ARE FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR DETAILED REQUIREMENTS.
4. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

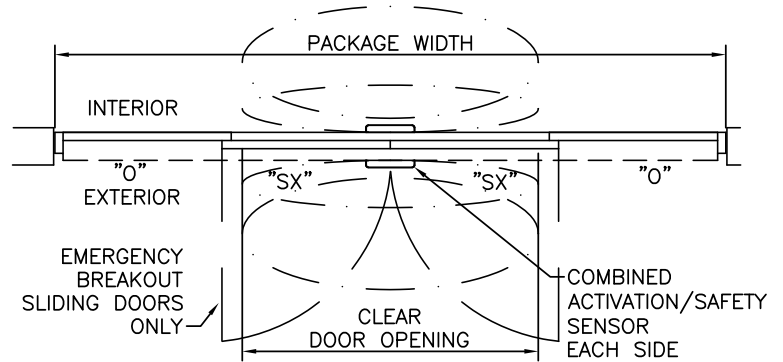

PLAN

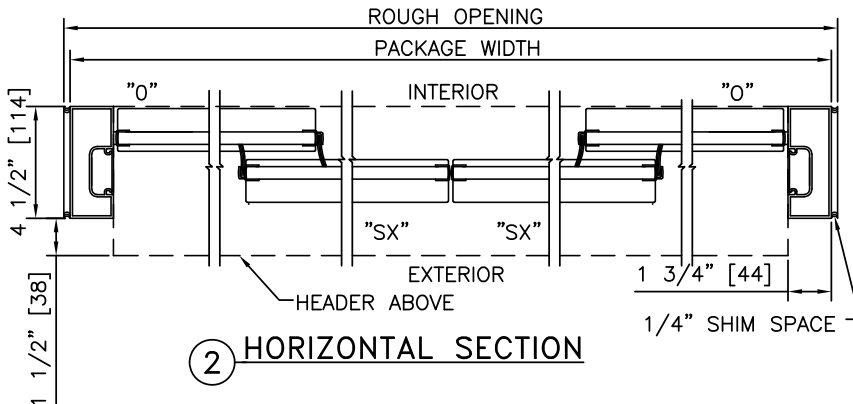

2 HORIZONTAL SECTION

TYPICAL PACKAGE DIMENSIONS (NARROW STILE)

PACKAGE WIDTH	NOMINAL CLEAR DOOR OPENING	DOOR PANEL NOMINAL WIDTH	EMERGENCY BREAKOUT NOM. WIDTH
120"	48.3"	30.3"	55.6"
144"	60.3"	36.3"	67.6"
168"	72.3"	42.3"	79.6"