





|                             |                                                                                              |
|-----------------------------|----------------------------------------------------------------------------------------------|
| <b>CONFIGURATIONS:</b>      | 2, 3, & 4-Panel, 2-Panel S&D, Trackless                                                      |
| <b>TYPICAL HEIGHT:</b>      | 88" (Std); taller available.                                                                 |
| <b>TYPICAL WIDTH:</b>       | 2-Panel (Std); 84" to 108"                                                                   |
| <b>HEADER SIZE:</b>         | 4" Nominal Height                                                                            |
| <b>BREAKOUT:</b>            | Sliding Panel Breakout, Any Position                                                         |
| <b>JAMB DIMENSION:</b>      | 4 1/2" x 1 3/4"                                                                              |
| <b>CLEAR DOOR OPENING:</b>  | 2-Panel (Std); 35 1/4" to 47 1/4"                                                            |
| <b>BREAKOUT OPENING:</b>    | 1-Panel (Std); 39" to 51"                                                                    |
| <b>SUPPORTED GLAZING:</b>   | 1/4" (Std); 5/8", 1/2", 1" Insulated, Electric Privacy Glass                                 |
| <b>STILES:</b>              | Narrow (Std), and Medium                                                                     |
| <b>BOTTOM RAILS:</b>        | 4" (Std), 6", 8", 10", 12", other custom                                                     |
| <b>FINISHES:</b>            | Anodized, PVDF Paint                                                                         |
| <b>HARDWARE OPTIONS:</b>    | Positive Latch, Single/Multi-Point Locking                                                   |
| <b>LISTINGS:</b>            | UL1784                                                                                       |
| <b>RATINGS:</b>             | 2-Panel Only: UL 1784 Leakage (Smoke & Draft), +/- Pressure                                  |
| <b>CODES AND STANDARDS:</b> | Smoke Provisions: (2-Panel Only) NFPA 101, NFPA 105, IBC<br>Egress Provisions: NFPA 101, IBC |

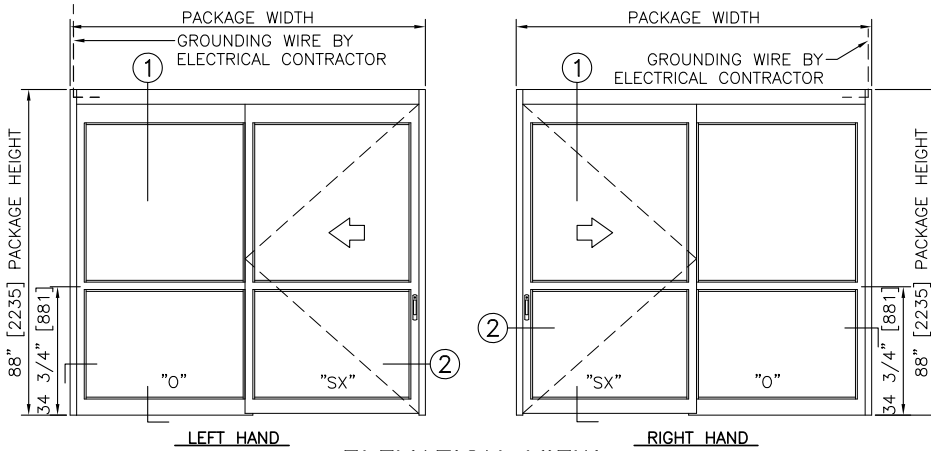


### ELEVATION VIEW

SCALE: 3/8" = 1'-0"

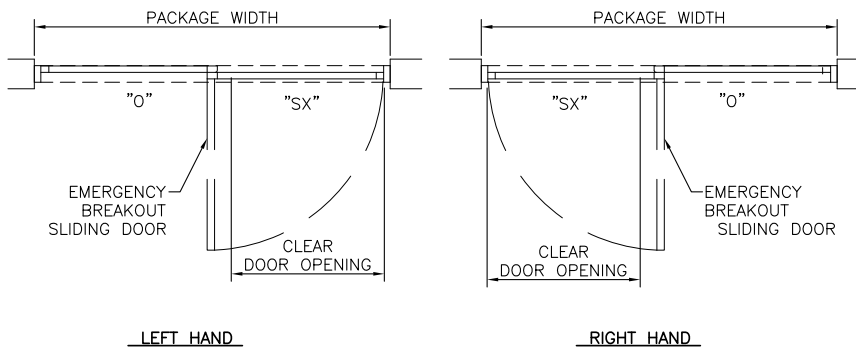

### PLAN VIEW


SCALE: 3/8" = 1'-0"

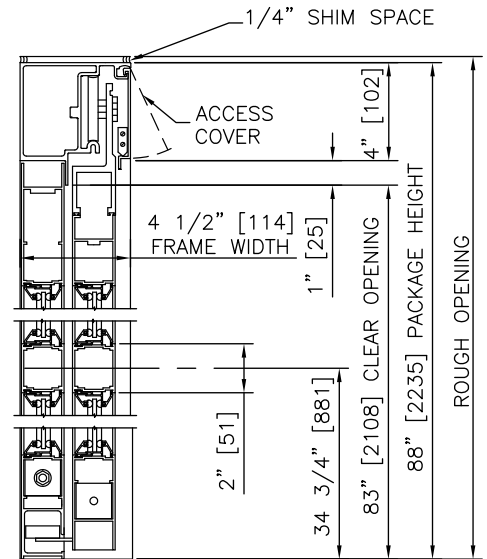

### LEFT HAND & RIGHT HAND

### 1 VERTICAL SECTION

SCALE: 2" = 1'-0"

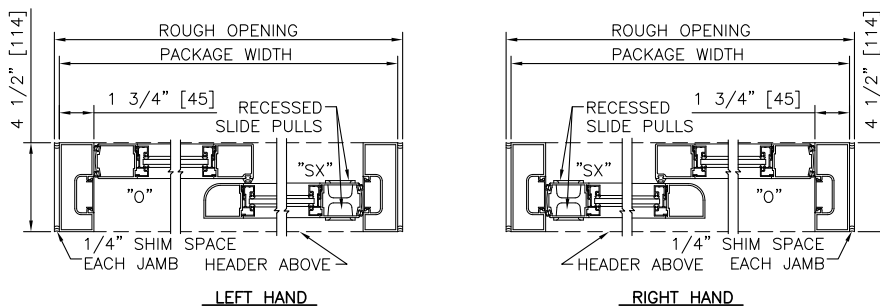

### 2 HORIZONTAL SECTION

SCALE: 2" = 1'-0"

#### NOTES

1. PACKAGE SHALL BE GROUNDED TO BUILDING GROUND SYSTEM. GROUNDING WIRE BY ELECTRICAL CONTRACTOR.
2. ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. STANDARD PACKAGE EXCLUDES LATCHING OR LOCKING. POSITIVE LATCHING AND LOCKING SYSTEMS AVAILABLE.

| TYPICAL PACKAGE DIMENSIONS (NARROW STILE) |                            |                          |                               |
|-------------------------------------------|----------------------------|--------------------------|-------------------------------|
| PACKAGE WIDTH                             | NOMINAL CLEAR DOOR OPENING | DOOR PANEL NOMINAL WIDTH | EMERGENCY BREAKOUT NOM. WIDTH |
| 84"                                       | 35.3"                      | 41.5"                    | 39.0"                         |
| 96"                                       | 41.3"                      | 47.5"                    | 45.0"                         |
| 108"                                      | 47.3"                      | 53.5"                    | 51.0"                         |

#### SINGLE SLIDE FORMULAS – NARROW STILE

PACKAGE WIDTH = 2 X CLEAR DOOR OPENING + 13.4"

CLEAR DOOR OPENING = 1/2 PACKAGE WIDTH - 6.7"

EMERGENCY BREAKOUT WIDTH = CLEAR DOOR OPENING + 3.8"

DOOR PANEL WIDTH = 1/2 PACKAGE WIDTH - 0.5"


#### SINGLE SLIDE FORMULAS – MEDIUM STILE

PACKAGE WIDTH = 2 X CLEAR DOOR OPENING + 17.8"

CLEAR DOOR OPENING = 1/2 PACKAGE WIDTH - 8.9"


EMERGENCY BREAKOUT WIDTH = CLEAR DOOR OPENING + 5.1"

DOOR PANEL WIDTH = 1/2 PACKAGE WIDTH + 0.2"

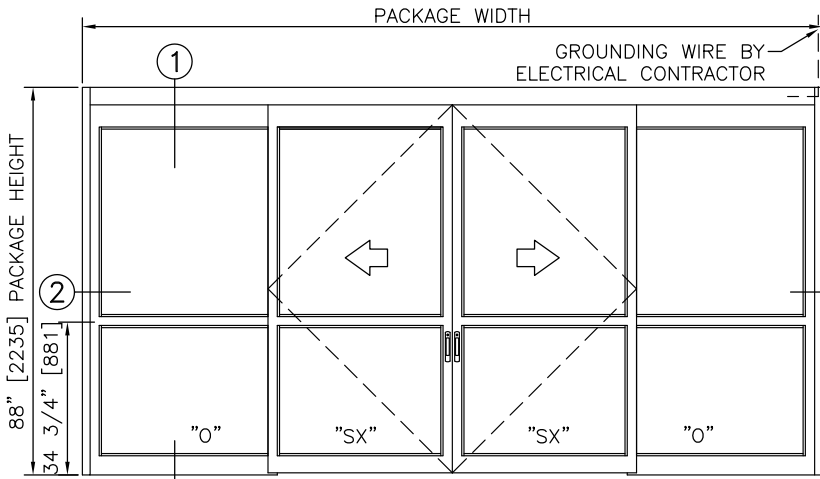


#### ELEVATION VIEW

SCALE: 3/8" = 1'-0"

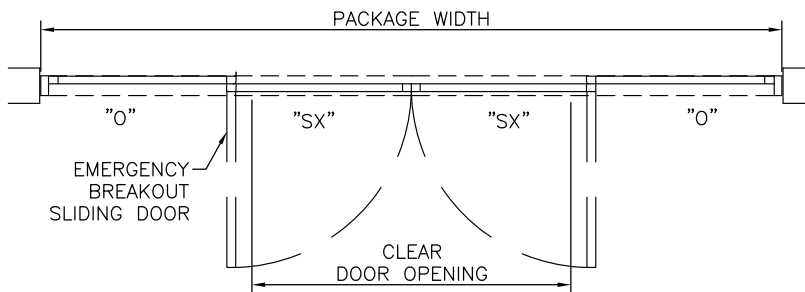


#### PLAN VIEW

SCALE: 3/8" = 1'-0"

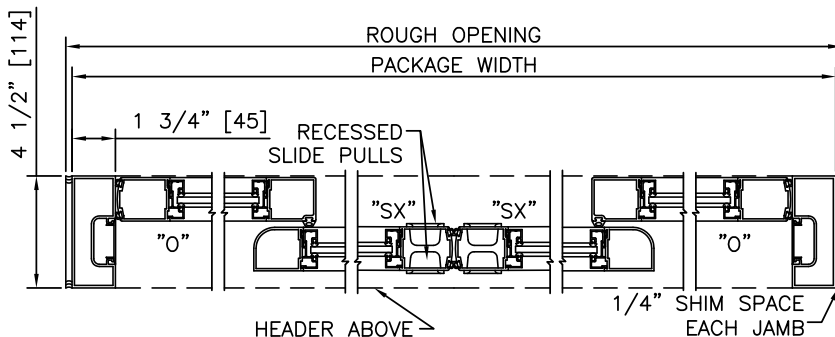

#### HORIZONTAL SECTION

SCALE: 2" = 1'-0"

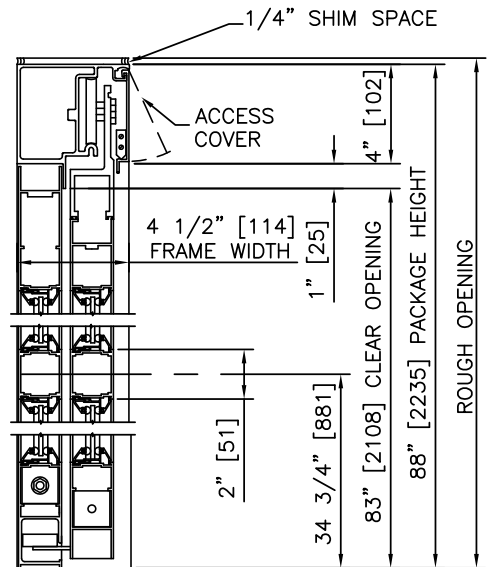

#### LEFT HAND & RIGHT HAND

#### VERTICAL SECTION

SCALE: 2" = 1'-0"

| TYPICAL PACKAGE DIMENSIONS (NARROW STYLE) |                            |                          |                               |
|-------------------------------------------|----------------------------|--------------------------|-------------------------------|
| PACKAGE WIDTH                             | NOMINAL CLEAR DOOR OPENING | DOOR PANEL NOMINAL WIDTH | EMERGENCY BREAKOUT NOM. WIDTH |
| 120"                                      | 48.3"                      | 30.3"                    | 55.6"                         |
| 144"                                      | 60.3"                      | 36.3"                    | 67.6"                         |
| 168"                                      | 72.3"                      | 42.3"                    | 79.6"                         |

#### NOTES

1. PACKAGE SHALL BE GROUNDED TO BUILDING GROUND SYSTEM. GROUNDING WIRE BY ELECTRICAL CONTRACTOR.
2. ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. STANDARD PACKAGE EXCLUDES LATCHING OR LOCKING. LOCKING SYSTEMS AVAILABLE.

#### BI-PART FORMULAS – NARROW STYLE

PACKAGE WIDTH = 2 X CLEAR DOOR OPENING + 23.4"

CLEAR DOOR OPENING = 1/2 PACKAGE WIDTH - 11.7"

EMERGENCY BREAKOUT WIDTH = CLEAR DOOR OPENING + 7.3"

DOOR PANEL WIDTH = 1/4 PACKAGE WIDTH + 0.3"

#### BI-PART FORMULAS – MEDIUM STYLE

PACKAGE WIDTH = 2 X CLEAR DOOR OPENING + 32.1"

CLEAR DOOR OPENING = 1/2 PACKAGE WIDTH - 16.0"

EMERGENCY BREAKOUT WIDTH = CLEAR DOOR OPENING + 10.3"

DOOR PANEL WIDTH = 1/4 PACKAGE WIDTH + 1.1"