



FULL ENERGY ENTRANCE WITH DOOR & M-FORCE	
PROJECT INFORMATION	
PROJECT NAME:	
LOCATION:	
DOOR NUMBER(S):	
DATE:	SHEET: OF


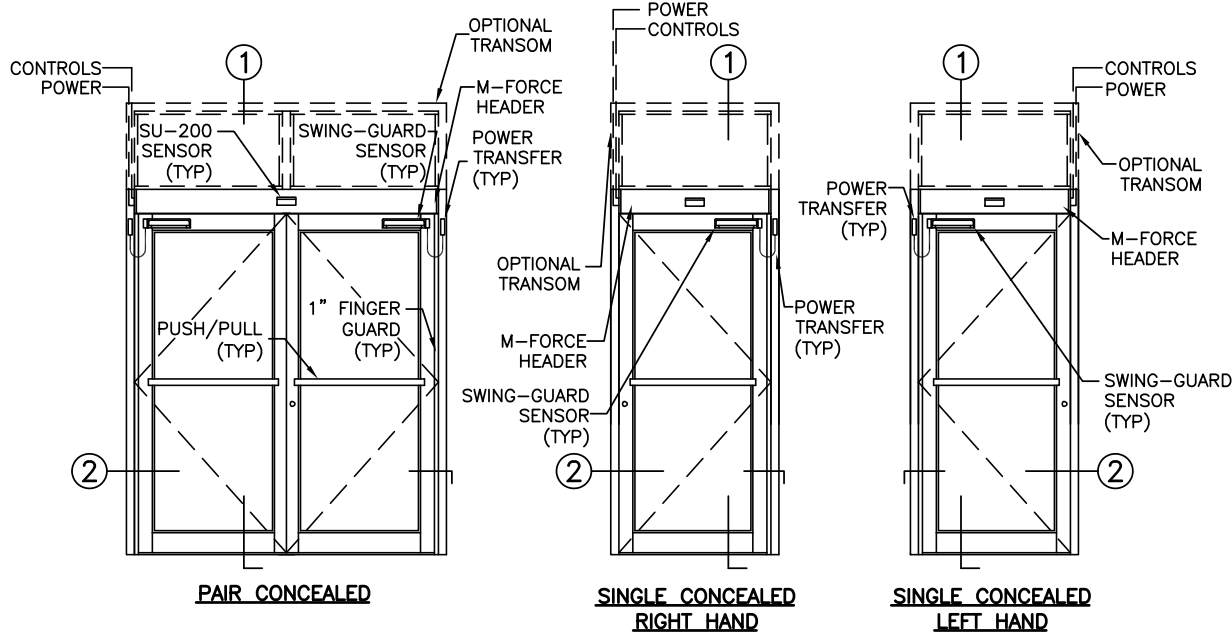


ELEVATIONS
SCALE: 1/4" = 1'-0"

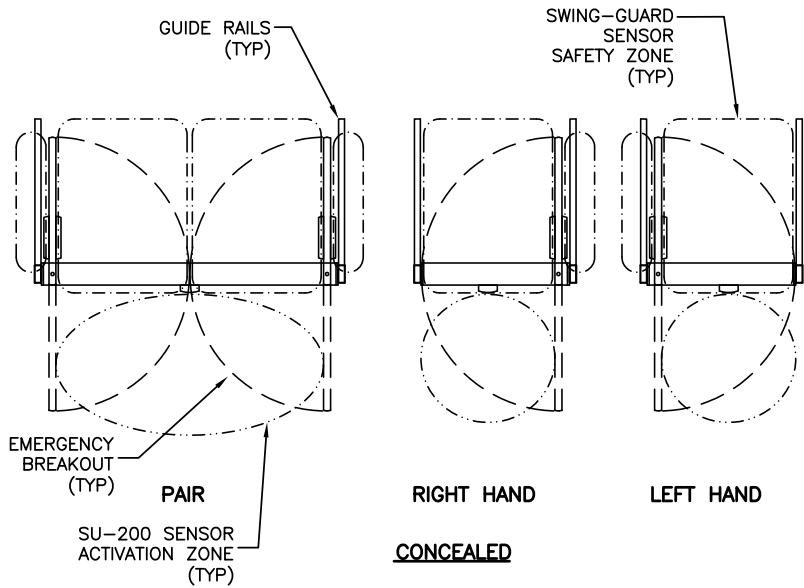


PLAN VIEWS
SCALE: 1/4" = 1'-0"


- NOTES**
- ELECTRICAL REQUIREMENTS: BY ELECTRICAL CONTRACTOR
 - 120 VAC, 5 AMP MIN TO OPERATOR.
 - CONTROL CIRCUIT FROM ACTIVATION TO OPERATOR.
 - STANDARD GLAZING STOPS FOR ALL PANELS ARE 1/4"[6]; 5/8"[16] AND 1"[25] AVAILABLE.
 - STANDARD STILES, AND BOTTOM RAILS; NARROW STILES, BOTTOM RAILS TO 12"[305], AND MUNTINS AVAILABLE.
 - DOORS MUST BE UN-LATCHED FOR PROPER OPERATION. PROVIDE TIME DELAY RELAY WHEN REQUIRED FOR PROPER OPERATION.
 - LIMITS OF ACTIVATION AND SAFETY ZONES ARE PROVIDED FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR SPECIFIC REQUIREMENTS.
 - OPERATOR AND INSTALLATION TO COMPLY WITH ANSI/BHMA A156.10.
 - SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

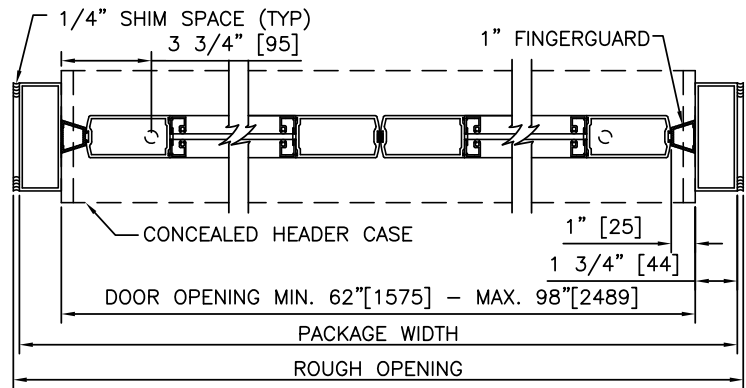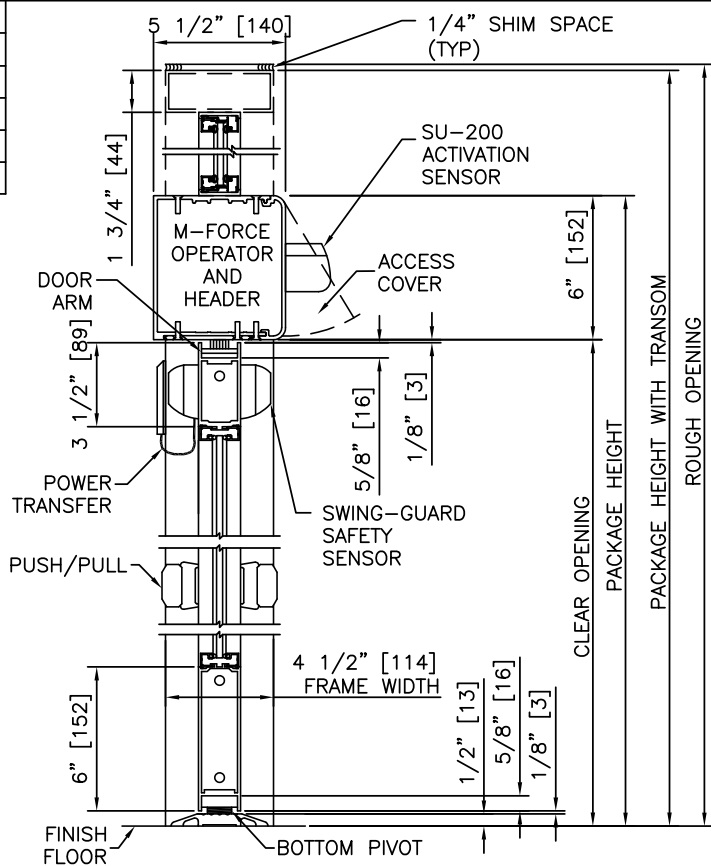

PAIR CONCEALED

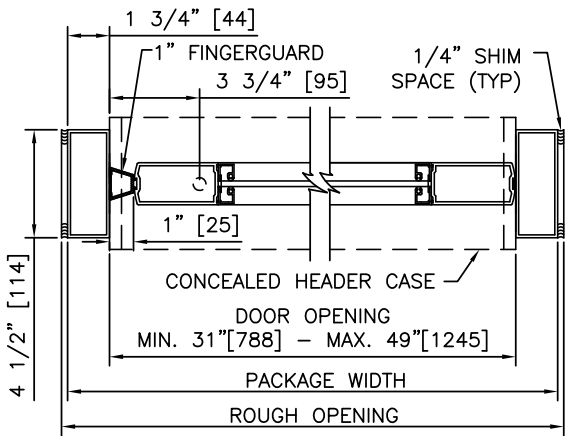

2 HORIZONTAL SECTIONS
SCALE: 1 1/2" = 1'-0"

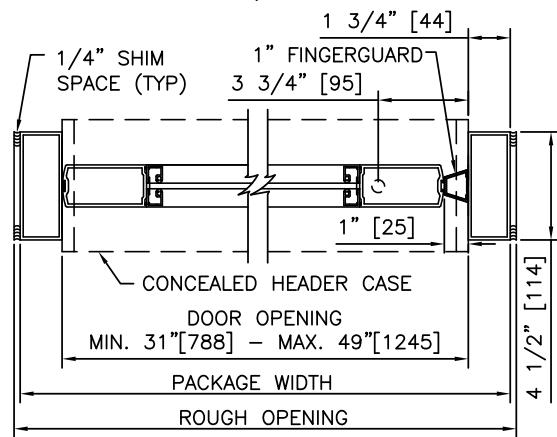

SINGLE CONCEALED


2 HORIZONTAL SECTIONS
SCALE: 1 1/2" = 1'-0"

FULL ENERGY ENTRANCE WITH DOOR & M-FORCE


**SWING-GUARD®
ENTRANCES**

STANLEY
Access Technologies


- PRODUCT OPTIONS**
- TRANSOM**
- ☐ YES
 - ☐ VERTICALS 1 2 3
- FINISH**
- ☐ ANODIZED CLEAR CL2
 - ☐ ANODIZED DK BRONZE
 - ☐ CUSTOM
- LOCKING**
- ☐ 1-POINT
 - ☐ 2-POINT
 - ☐ 3-POINT
- STILES**
- ☐ NARROW
 - ☐ MEDIUM
- BOTTOM RAILS**
- ☐ STANDARD 6"
 - ☐ OPTIONAL 8" 10" 12"
- THRESHOLDS**
- ☐ SQ/BVL (EXT)
 - ☐ SQ/BVL (INT)
 - ☐ DBL BVL
 - ☐ RECESSED
- OTHER OPTIONS**
- ☐ ARMORED STRIKE

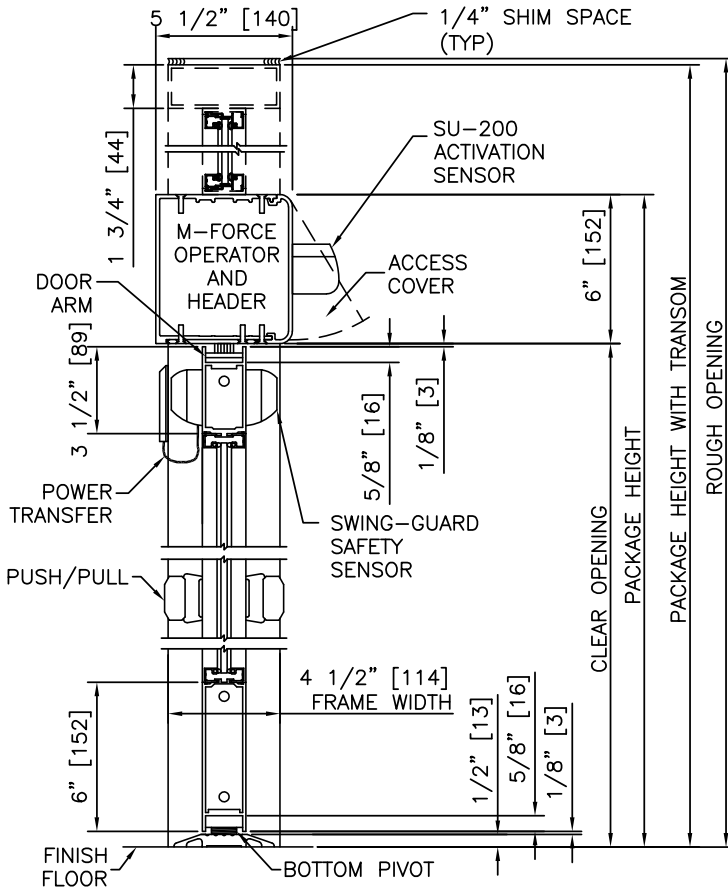


① VERTICAL SECTION

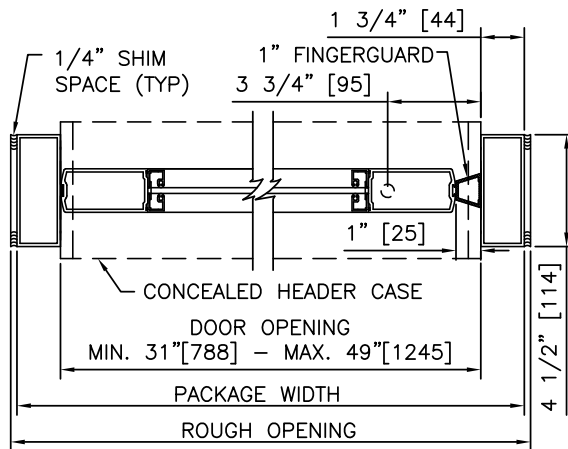

② HORIZONTAL SECTION

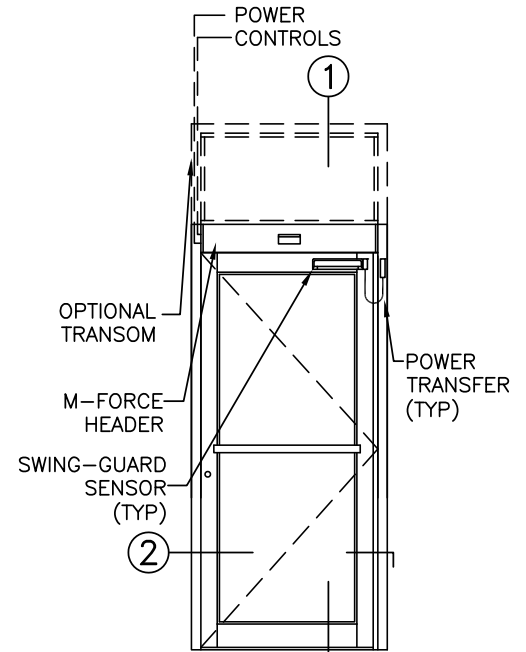


ELEVATION

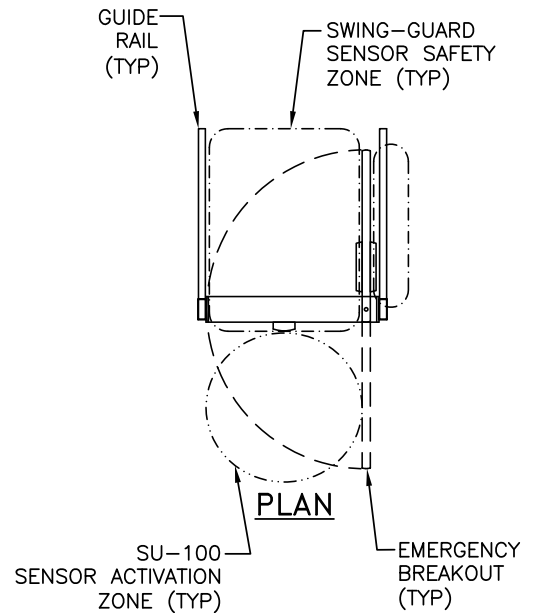


PLAN

NOTES


1. DETAILS NOT TO SCALE.
2. ELECTRICAL REQUIREMENTS: BY ELECTRICAL CONTRACTOR
 - 2.1. 120 VAC, 5 AMP MIN TO OPERATOR.
 - 2.2. CONTROL CIRCUIT FROM ACTIVATION TO OPERATOR.
3. STANDARD GLAZING STOPS FOR ALL PANELS ARE 1/4"[6]; 5/8"[16] AND 1"[25] AVAILABLE.
4. STANDARD STILES, AND BOTTOM RAILS SHOWN; NARROW STILES, BOTTOM RAILS TO 12"[305], AND MUNTINS AVAILABLE.
5. DOORS MUST BE UN-LATCHED FOR PROPER OPERATION. PROVIDE TIME DELAY RELAY WHEN REQUIRED FOR PROPER OPERATION.
6. LIMITS OF ACTIVATION AND SAFETY ZONES ARE PROVIDED FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR SPECIFIC REQUIREMENTS.
7. OPERATOR AND INSTALLATION TO COMPLY WITH ANSI/BHMA A156.10.
8. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

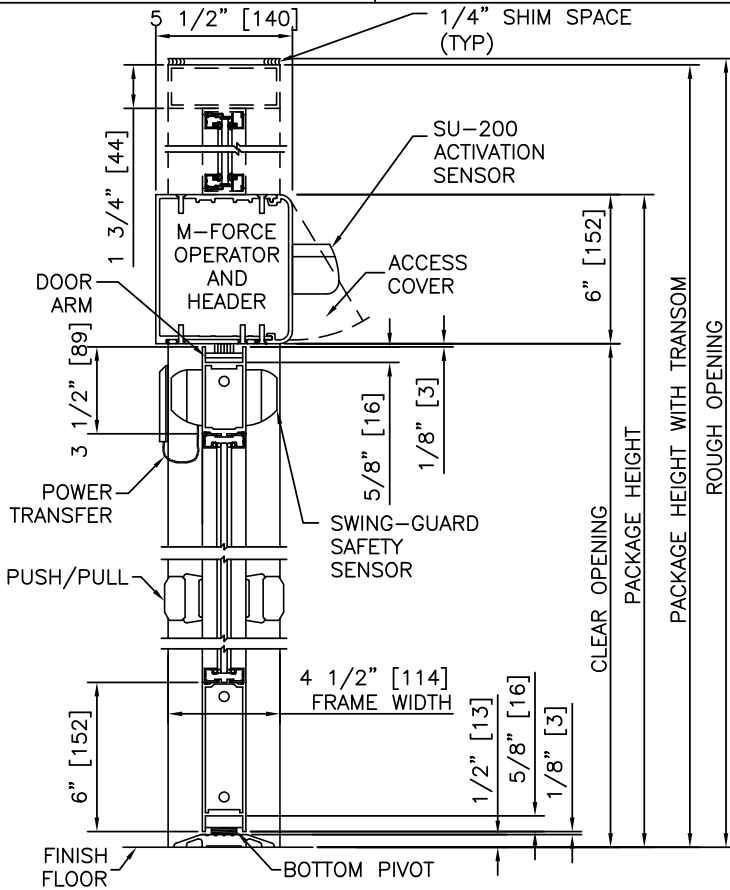


1 VERTICAL SECTION

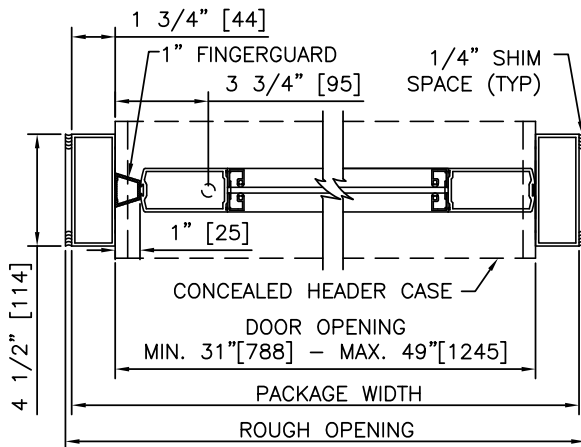

2 HORIZONTAL SECTION

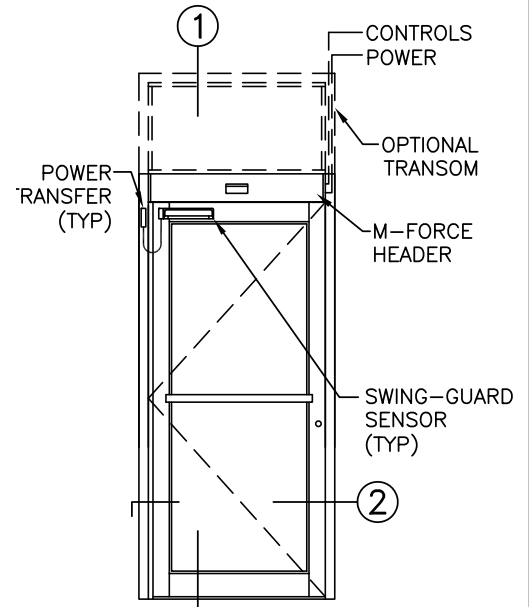


ELEVATION

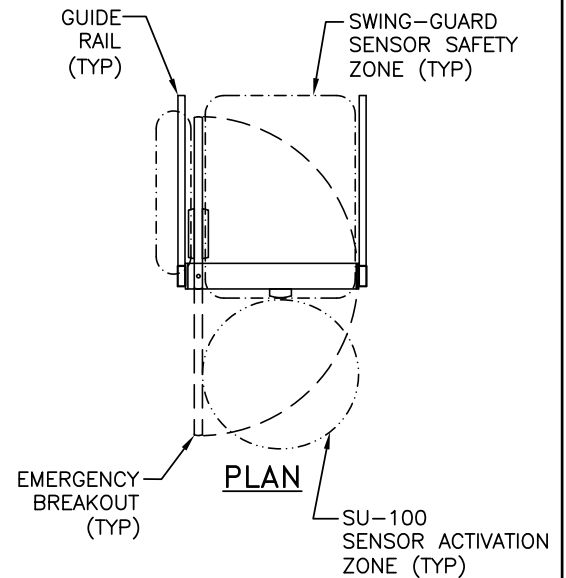


PLAN

NOTES


1. DETAILS NOT TO SCALE.
2. ELECTRICAL REQUIREMENTS: BY ELECTRICAL CONTRACTOR
 - 2.1. 120 VAC, 5 AMP MIN TO OPERATOR.
 - 2.2. CONTROL CIRCUIT FROM ACTIVATION TO OPERATOR.
3. STANDARD GLAZING STOPS FOR ALL PANELS ARE 1/4" [6]; 5/8" [16] AND 1" [25] AVAILABLE.
4. STANDARD STILES, AND BOTTOM RAILS SHOWN; NARROW STILES, BOTTOM RAILS TO 12" [305], AND MUNTINS AVAILABLE.
5. DOORS MUST BE UN-LATCHED FOR PROPER OPERATION. PROVIDE TIME DELAY RELAY WHEN REQUIRED FOR PROPER OPERATION.
6. LIMITS OF ACTIVATION AND SAFETY ZONES ARE PROVIDED FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR SPECIFIC REQUIREMENTS.
7. OPERATOR AND INSTALLATION TO COMPLY WITH ANSI/BHMA A156.10.
8. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

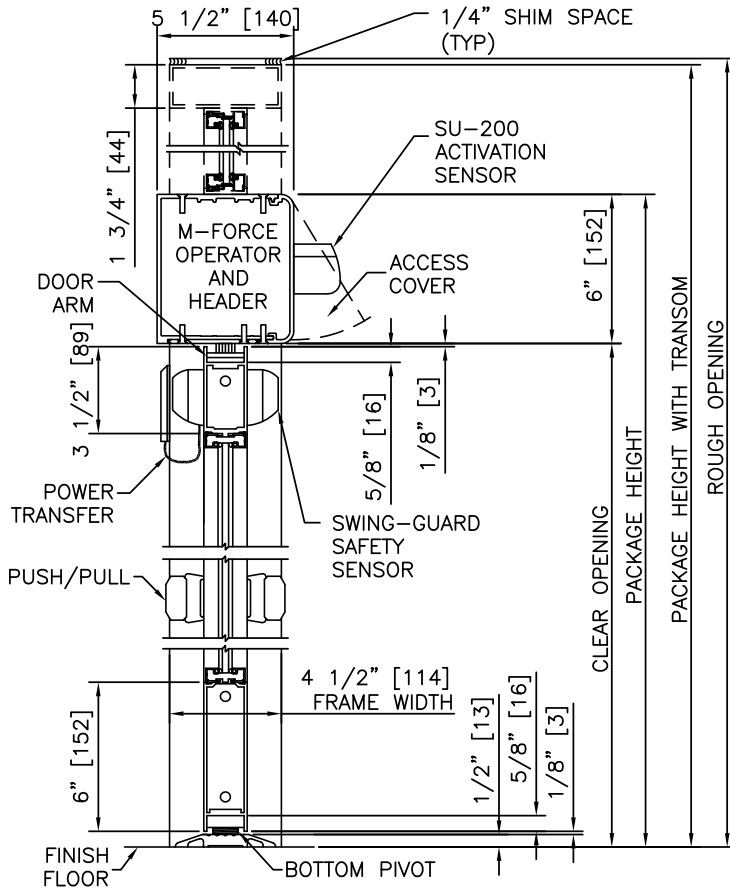


1 VERTICAL SECTION

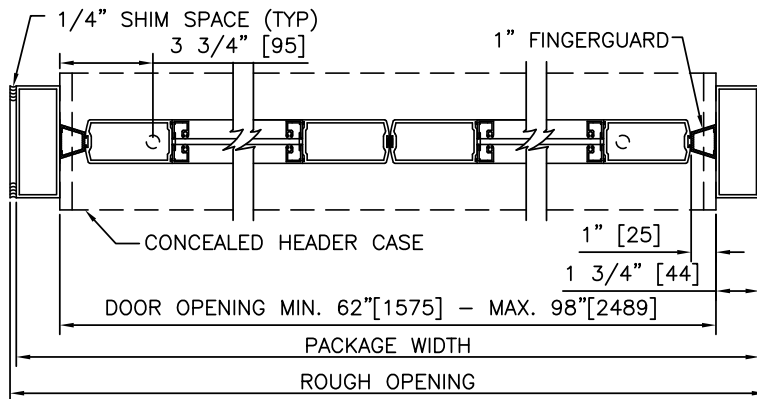

2 HORIZONTAL SECTION

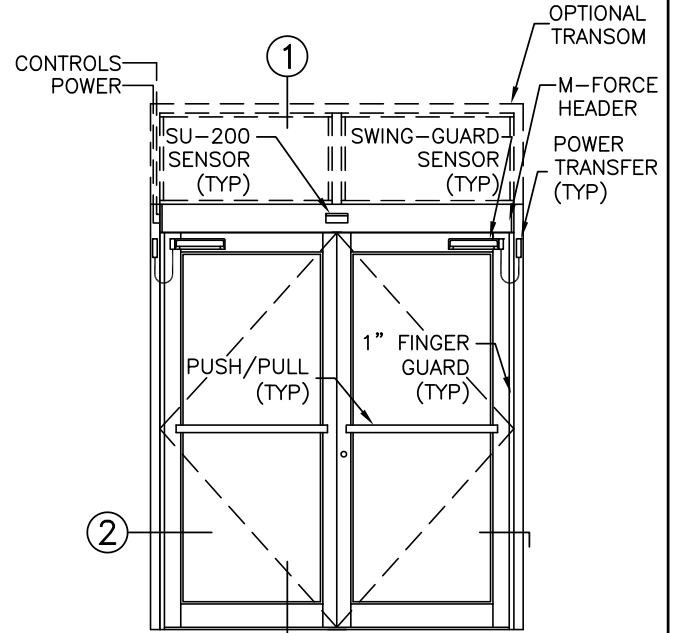

ELEVATION

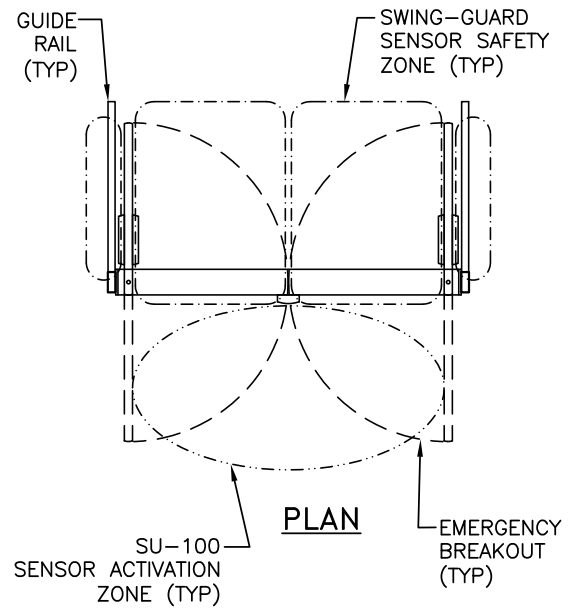

PLAN

NOTES

1. DETAILS NOT TO SCALE.
2. ELECTRICAL REQUIREMENTS: BY ELECTRICAL CONTRACTOR
 - 2.1. 120 VAC, 5 AMP MIN TO OPERATOR.
 - 2.2. CONTROL CIRCUIT FROM ACTIVATION TO OPERATOR.
3. STANDARD GLAZING STOPS FOR ALL PANELS ARE 1/4" [6]; 5/8" [16] AND 1" [25] AVAILABLE.
4. STANDARD STILES, AND BOTTOM RAILS SHOWN; NARROW STILES, BOTTOM RAILS TO 12" [305], AND MUNTINS AVAILABLE.
5. DOORS MUST BE UN-LATCHED FOR PROPER OPERATION. PROVIDE TIME DELAY RELAY WHEN REQUIRED FOR PROPER OPERATION.
6. LIMITS OF ACTIVATION AND SAFETY ZONES ARE PROVIDED FOR REFERENCE ONLY; SEE ANSI/BHMA A156.10 FOR SPECIFIC REQUIREMENTS.
7. OPERATOR AND INSTALLATION TO COMPLY WITH ANSI/BHMA A156.10.
8. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.