

Widest ICU Clear Door Opening

PROCARE 8500™ TELESCOPING 3 PANEL ICU DOOR

Seamless patient and equipment transfer without needing breakout.

The latest ICU door in our ProCare Series, the ProCare 8500 comes in fully automatic, automatic with Power Assist (8500A) or manual. The 8500A easily switches between power assist and automatic mode. With the same size header utilized for both manual and automatic applications, sight lines through the facility are maintained for an improved aesthetic. The ProCare 8500 was engineered to create the widest clear door opening in the industry at over 56" of clearance for an 8' telescoping, 3-panel ICU door.

Features and Benefits

- 56"* CDO on an 8' telescoping ICU door
- Redesigned header to maintain aesthetics and provide larger height clearance
- Effortless breakout and reset with single button release
- Quiet operation for patient comfort
- Contoured handles and latch shield eliminate snagging on IV lines, electrical cords, and other equipment
- Synchronized moving panels on a fully trackless system prevent slamming for quieter operation and less wear on components

*CDO for manual 8' package is 56.8", automatic 8' package is 55.7"


PROCARE 8500™

TELESCOPING 3 PANEL ICU DOOR

www.stanleyaccess.com

OPTIONAL FEATURES

- Antimicrobial touchpoints for greater patient and staff protection
- Electric privacy glass or privacy blinds
- Self-closing with electromagnetic hold open for manual doors
- Keyed or card reader access for increased security
- Low and full energy automatic options
- Packages available for smoke and draft prevention, airborne infection isolation (manual and automatic), and clean rooms applications

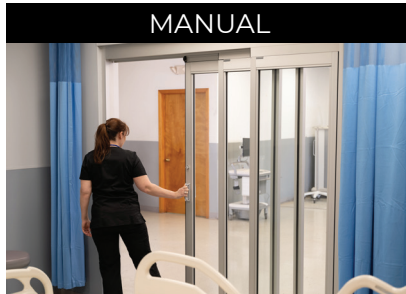

MANUAL



AUTOMATIC

SPECIFICATIONS



Description	Configuration
Configurations	Automatic or Manual 3-Panel Trackless, Smoke & Draft (optional), Isolation (optional)
Swing Out	3 Panels swing out from full open position
Typical Height	88" (Std); taller available.
Typical Width	3-Panel (Std) ; 84" to 120", 96" (Std)
Header Size	4 1/8" Nominal Height
Jamb Dimension	Manual – 6"x7/8" standard, 6"x1 3/4" optional. Auto – 6"x1 3/4" only
Clear Door Opening Width	Manual: 56.8" at 96" package width (7/8" jambs); Auto: 55.7" at 96" package width (1 3/4" jambs) Refer to architectural drawing for CDO at other package widths
Utility Breakout Nominal Width	Manual: 87.8" at 96" package width (7/8" jambs); Auto: 86" at 96" package width (1 3/4" jambs) Refer to architectural drawing for CDO at other package widths
Supported Glazing	1/4" (Std); 5/8", 1/2", 1" Insulated, Electronic Privacy Glass (EPG), Privacy Blinds
Stiles	Narrow
Bottom Rails	4" (Std), 6", 8", 10", 12", other custom
Muntins	0, 1 (Std) or 2 2" and 4 1/4" Std. Other options available.
Finishes	Anodized, PVDF Paint, Anti-Microbial (Touch Points or All)
Hardware Options	Positive Latch, Single-Point Locking, Concealed Self Closing
Listings	UL1784
Ratings	Leakage (Smoke & Draft), Positive/Negative Pressure (ASTM E283), Clean Room (ISO 14644-1, Class 3), STC (Sound Transmittance)
Codes And Standards	NFPA 101, NFPA 105, IBC, FGI
Activation/Safety	Full Energy ANSI/BHMA A156.10 (Std), Low Energy ANSI/BHMA A156.38 (Full Energy / Low Energy); Jamb Mounted Touchless Activation + Combined Activation/Safety Sensors

* All Specifications are subject to change. Please contact your local sales representative to ensure accuracy.

LOCKING OPTIONS

- Positive Latching (Optional; included with smoke-rated products)
- Cylinder Pull with lock
- Key/Thumb Turn Hook Bolt (1-Point)
- Lock position indicator (optional)
- Electric Strike (Automatic only)

ARCHITECTURAL DRAWINGS

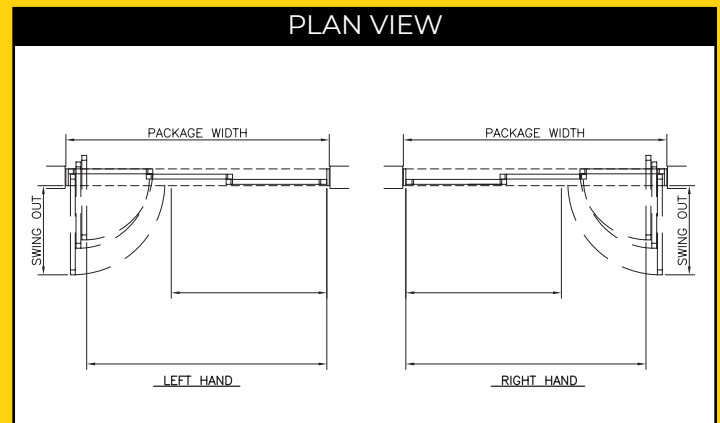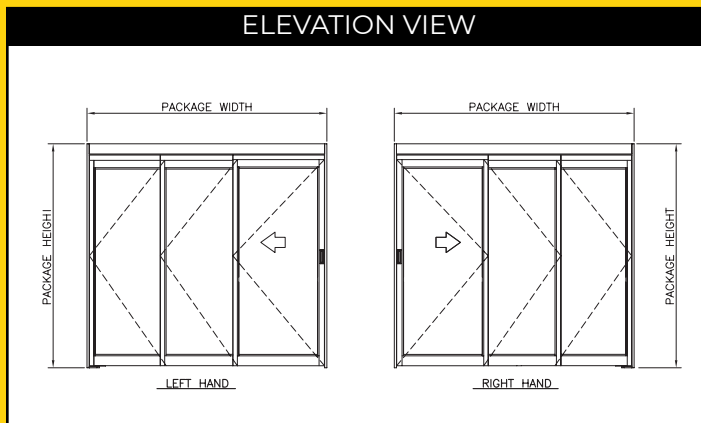

Drawings shown are 7/8" jambs for manual doors. Automatic doors require 1 3/4" jambs