

STANLEY

Access Technologies

PROCARE™

8300BP

SERIES

BI-PARTING TRACKLESS

PROJECT INFORMATION


PROJECT NAME:

LOCATION:


DOOR NUMBER(S):

DATE:

SHEET: OF

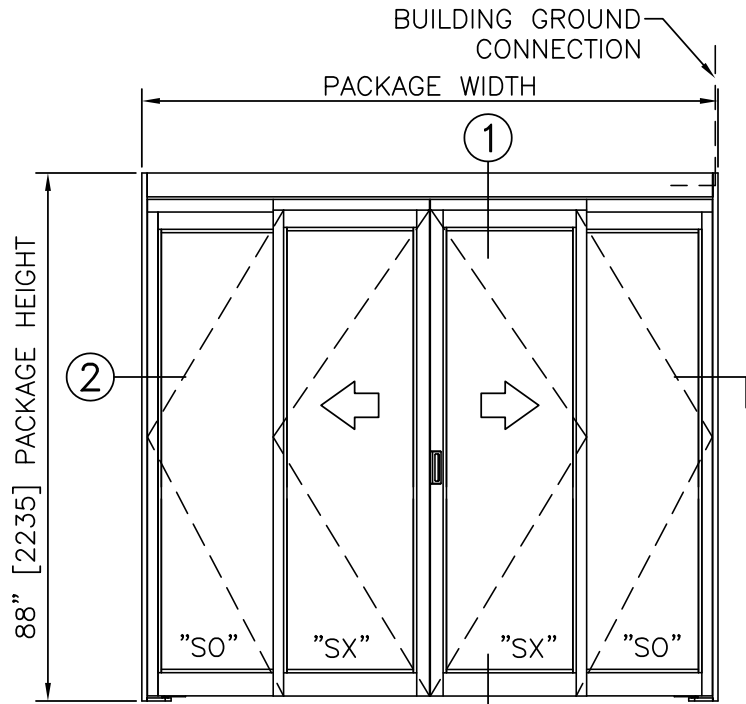


ELEVATION VIEW
SCALE: 3/8" = 1'-0"

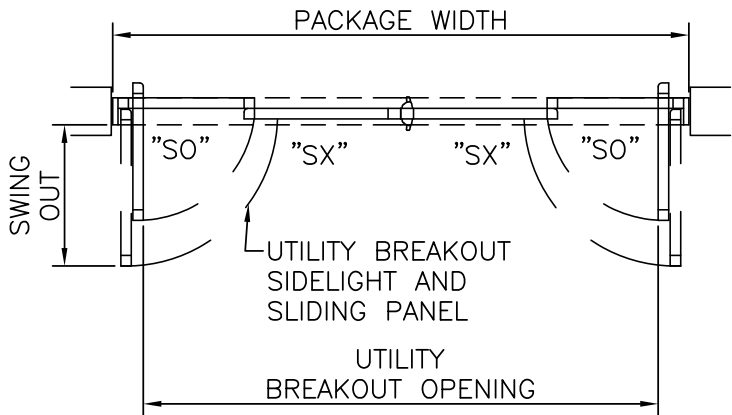


PLAN VIEW
SCALE: 3/8" = 1'-0"

- NOTES
1. CONNECTION TO BUILDING GROUND BY ELECTRICAL CONTRACTOR.
 2. ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
 3. STANDARD PACKAGE EXCLUDES LATCHING OR LOCKING. POSITIVE LATCHING AND LOCKING SYSTEMS AVAILABLE; POSITIVE LATCHING INCLUDED ON LEAKAGE RATED ASSEMBLIES.
 4. STANDARD GLAZING STOPS FOR ALL PANELS ARE 1/4"[6]; 1/2"[13], 5/8"[16], AND 1"[25] AVAILABLE.
 5. STANDARD STILES, AND BOTTOM RAILS SHOWN; BOTTOM RAILS TO 12"[305]; 2"[51] AND 4 1/4"[108] MUNTINS AVAILABLE.
 6. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

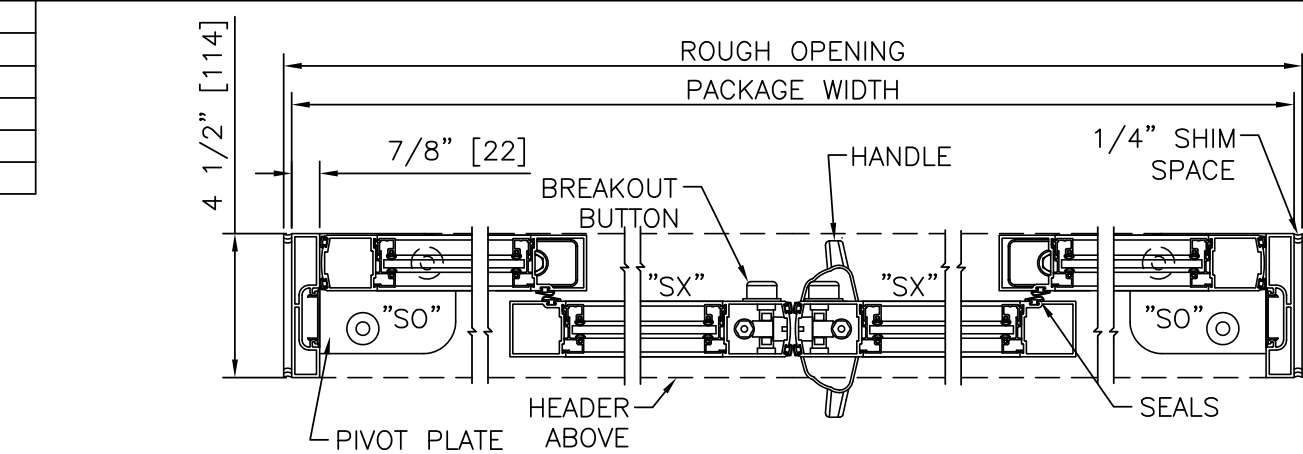

HORIZONTAL SECTION
SCALE: 2" = 1'-0"

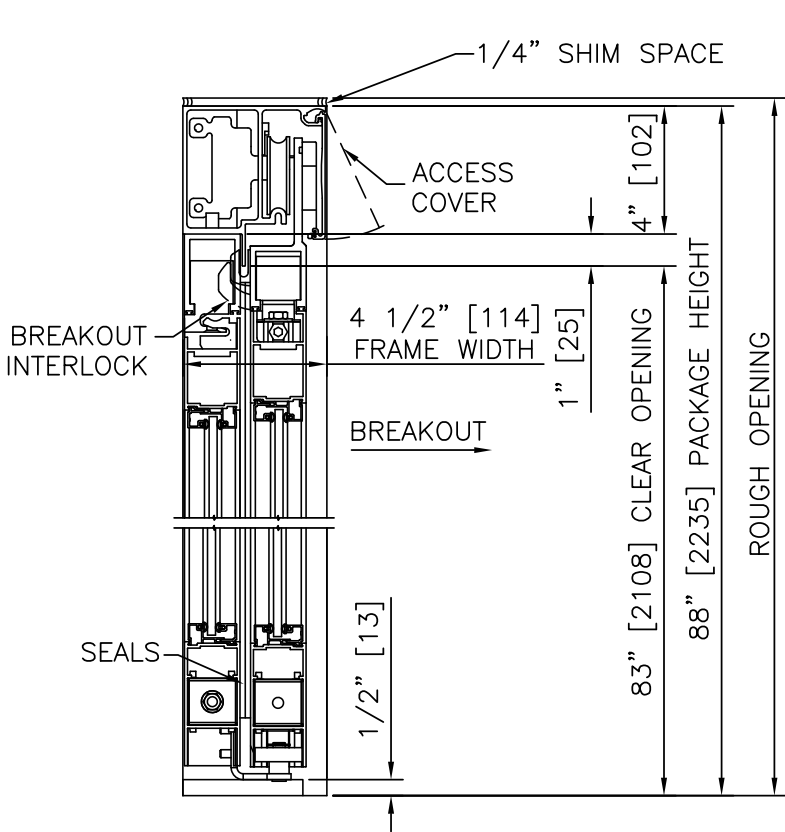

LEFT HAND & RIGHT HAND
VERTICAL SECTION
SCALE: 2" = 1'-0"

TYPICAL PACKAGE DIMENSIONS (7/8" JAMBS)					
PACKAGE WIDTH	NOMINAL CLEAR DOOR OPENING	SLIDING PANEL NOMINAL WIDTH	SIDELIGHT PANEL NOMINAL WIDTH	UTILITY BREAKOUT NOMINAL WIDTH	SWING OUT NOMINAL WIDTH
84" [2134]	35.1" [892]	23.1" [586]	20.2" [513]	73.8" [1873]	20.7" [525]
96" [2438]	41.1" [1045]	26.1" [662]	23.2" [589]	85.8" [2178]	23.7" [602]
120" [3048]	53.1" [1349]	32.1" [814]	29.2" [741]	109.8" [2788]	29.7" [754]
144" [3658]	65.1" [1654]	38.1" [967]	35.2" [894]	133.8" [3397]	35.7" [906]

- PRODUCT OPTIONS
- FINISH
- ☒ ANODIZED CLEAR CL2
 - ☐ CUSTOM
- LATCHING/LOCKING
- ☐ POSITIVE LATCH
 - ☐ 1-POINT
 - ☐ LOCK INDICATOR
- BOTTOM RAILS
- ☐ 4" (STD)
 - ☐ 6" 8" 10" 12"
- MUNTINS
- ☐ 2"
 - ☒ QUANTITY 0 (STD) 1 2
 - ☐ 4 1/4"
- JAMBS
- ☒ 7/8" X 4 1/2" POCKET JAMB (STD)
 - ☐ 1 3/4" X 4 1/2" POCKET JAMB
- OTHER OPTIONS
- ☐ POSITIVE LATCH (REQUIRED FOR UL1784)
 - ☐ SMOKE & DRAFT SEALS (REQ'D FOR UL1784)
 - ☐ BOTTOM SWEEPS
 - ☐ SELF CLOSER
 - ☐ ANTI-MICROBIAL COATING (TOUCH POINTS)

BI-PARTING FORMULAS (7/8" JAMBS)

PACKAGE WIDTH = 2 X CLEAR DOOR OPENING + 13.8"[349]

CLEAR DOOR OPENING = 1/2 PACKAGE WIDTH - 6.9"[175]

UTILITY BREAKOUT WIDTH = PACKAGE WIDTH - 10.3"[260]

SX DOOR PANEL WIDTH = 1/4 PACKAGE WIDTH + 2.1"[52]

SO DOOR PANEL WIDTH = 1/4 PACKAGE WIDTH - 0.8"[21]

SWING OUT WIDTH = SX PANEL WIDTH - 2.4"[60]

BI-PARTING FORMULAS (1 3/4" JAMBS)

PACKAGE WIDTH = 2 X CLEAR DOOR OPENING + 15.5"[394]

CLEAR DOOR OPENING = 1/2 PACKAGE WIDTH - 7.8"[197]

UTILITY BREAKOUT WIDTH = PACKAGE WIDTH - 12.0"[305]

SX DOOR PANEL WIDTH = 1/4 PACKAGE WIDTH + 1.6"[41]

SO DOOR PANEL WIDTH = 1/4 PACKAGE WIDTH - 1.3"[32]

SWING OUT WIDTH = SX PANEL WIDTH - 2.4"[60]


PROCARE™

8300BP


SERIES

STANLEY


Access Technologies

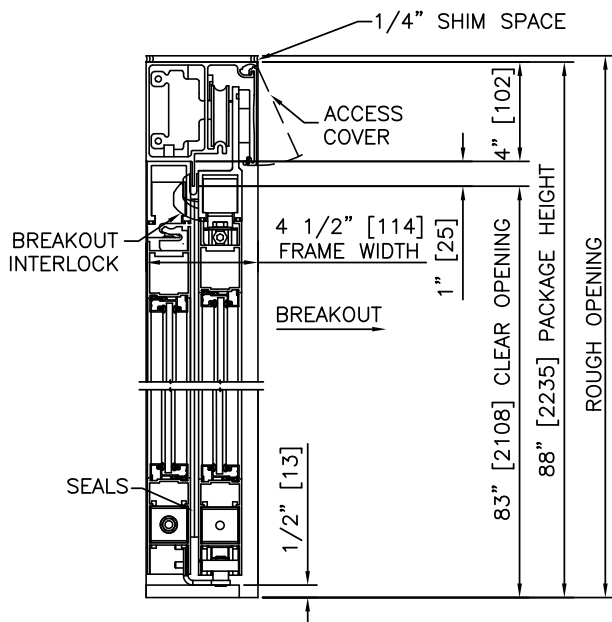

① VERTICAL SECTION

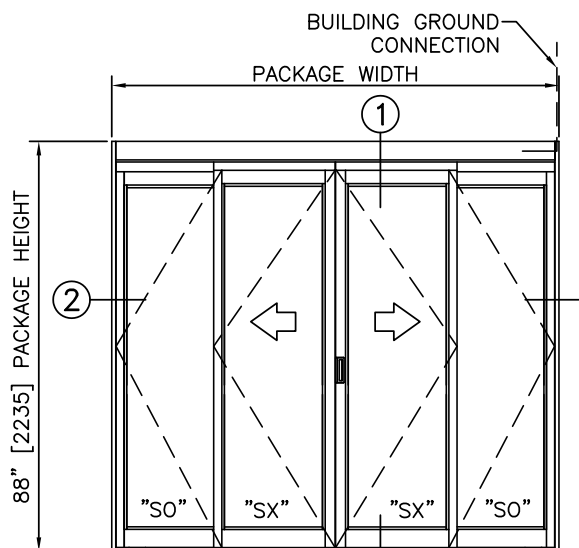


ELEVATION

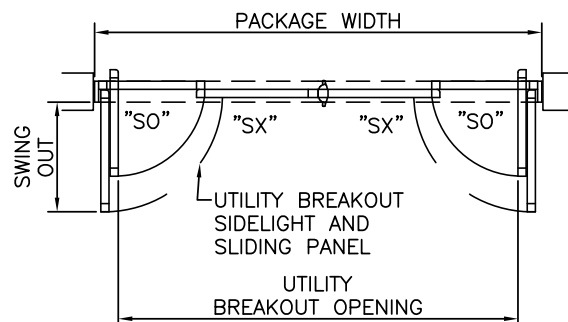

PLAN




NOTES

1. CONNECTION TO BUILDING GROUND BY ELECTRICAL CONTRACTOR.
2. ROUGH OPENING SHALL PROVIDE 1/4\"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. STANDARD PACKAGE EXCLUDES LATCHING OR LOCKING. POSITIVE LATCHING AND LOCKING SYSTEMS AVAILABLE; POSITIVE LATCHING INCLUDED ON LEAKAGE RATED ASSEMBLIES.
4. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

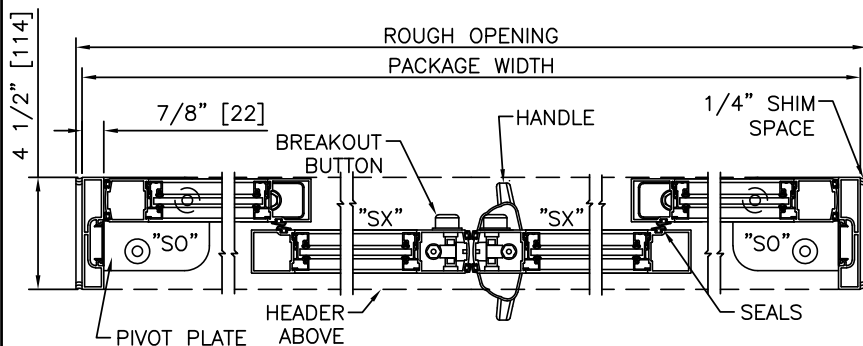


② HORIZONTAL SECTION

TYPICAL PACKAGE DIMENSIONS (7/8\" JAMBS)					
PACKAGE WIDTH	NOMINAL CLEAR DOOR OPENING	SLIDING PANEL NOMINAL WIDTH	SIDELIGHT PANEL NOMINAL WIDTH	UTILITY BREAKOUT NOMINAL WIDTH	SWING OUT NOMINAL WIDTH
84\" [2134]	35.1\" [892]	23.1\" [586]	20.2\" [513]	73.8\" [1873]	20.7\" [525]
96\" [2438]	41.1\" [1045]	26.1\" [662]	23.2\" [589]	85.8\" [2178]	23.7\" [602]
120\" [3048]	53.1\" [1349]	32.1\" [814]	29.2\" [741]	109.8\" [2788]	29.7\" [754]
144\" [3658]	65.1\" [1654]	38.1\" [967]	35.2\" [894]	133.8\" [3397]	35.7\" [906]

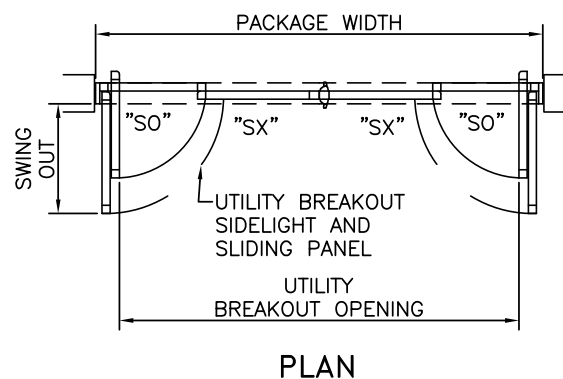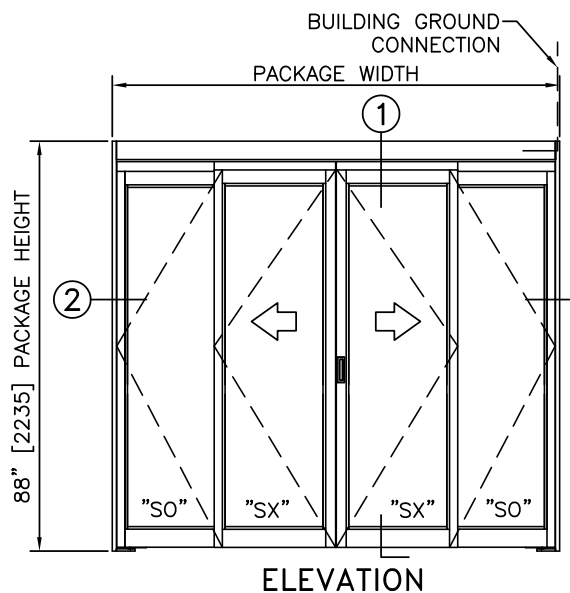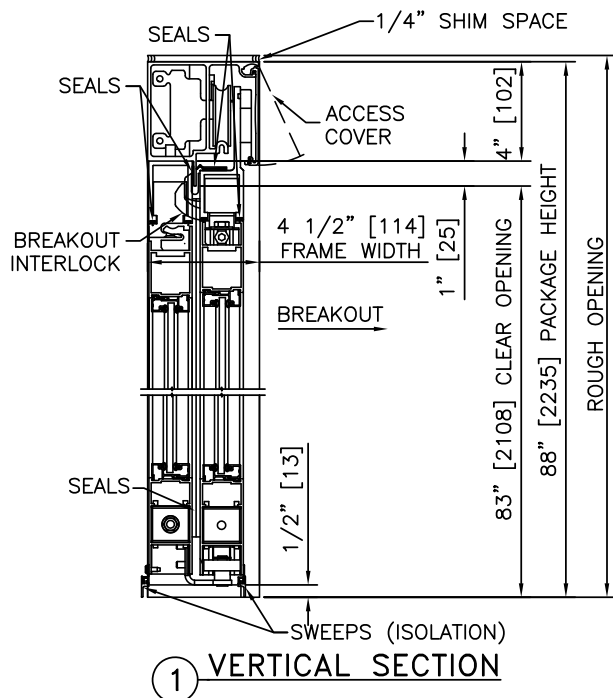

NOTES

1. CONNECTION TO BUILDING GROUND BY ELECTRICAL CONTRACTOR.
2. ROUGH OPENING SHALL PROVIDE 1/4"[6] SHIM SPACE ON SIDES AND TOP OF PACKAGE.
3. STANDARD PACKAGE INCLUDES POSITIVE LATCHING. LOCKING SYSTEMS AVAILABLE
4. PRODUCT IS CERTIFIED AS AN EFFECTIVE BARRIER AGAINST THE PASSAGE OF SMOKE IN ACCORDANCE WITH UL1784.
5. SEE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

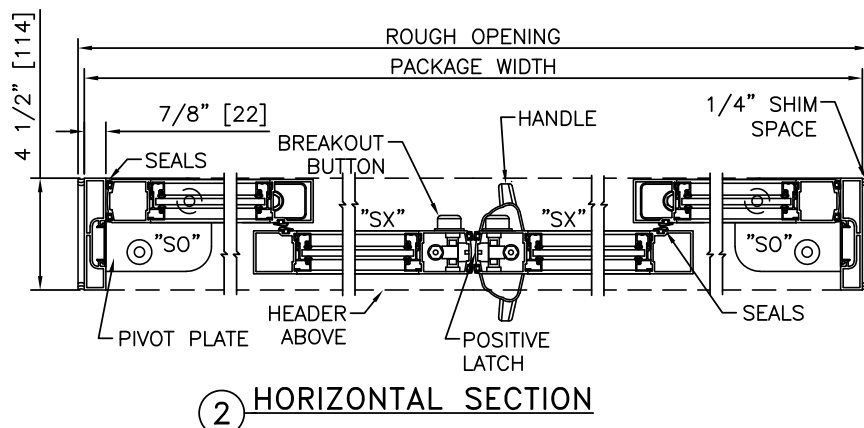

TYPICAL PACKAGE DIMENSIONS (7/8" JAMBS)					
PACKAGE WIDTH	NOMINAL CLEAR DOOR OPENING	SLIDING PANEL NOMINAL WIDTH	SIDELIGHT PANEL NOMINAL WIDTH	UTILITY BREAKOUT NOMINAL WIDTH	SWING OUT NOMINAL WIDTH
84" [2134]	35.1" [892]	23.1" [586]	20.2" [513]	73.8" [1873]	20.7" [525]
96" [2438]	41.1" [1045]	26.1" [662]	23.2" [589]	85.8" [2178]	23.7" [602]
120" [3048]	53.1" [1349]	32.1" [814]	29.2" [741]	109.8" [2788]	29.7" [754]
144" [3658]	65.1" [1654]	38.1" [967]	35.2" [894]	133.8" [3397]	35.7" [906]